
Datasheet

P/N: GA712-292YFGPPF-XXX

2.92mm Bulkhead Female to GPPO(Mini-SMP) Female Cable Assembly | .086" Semi-Flexible Coax Cable With FEP Jacket | DC - 40GHz



Dimensions are in mm

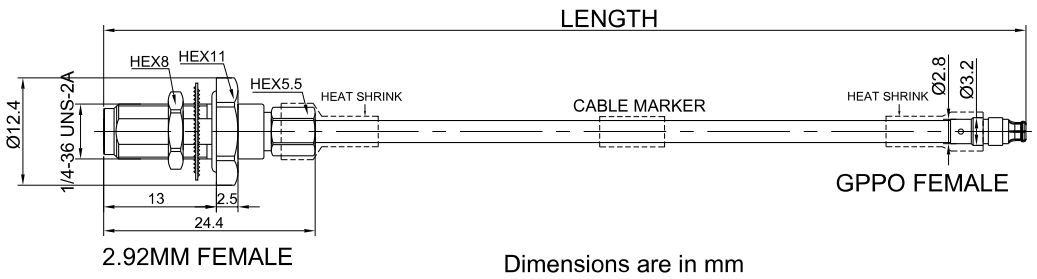

Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	Bulkhead	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	CuBe
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Shield Layer 1 Material	Tin Plated Copper
Jacket Material	FEP
Cable Diameter (mm)	2.54
Cable Color	Blue
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com

P/N: GA712-292YFGPPF-XXX

2.92mm Bulkhead Female to GPPO(Mini-SMP) Female Cable Assembly | .086" Semi-Flexible Coax Cable With FEP Jacket | DC - 40GHz


Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 40GHz	12dB	1.32
150	±3			1.63
200	±3			1.94
250	±3			2.25
300	±5			2.56
400	±5			3.21
500	±5			3.82

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C

Test Report for Cable assembly

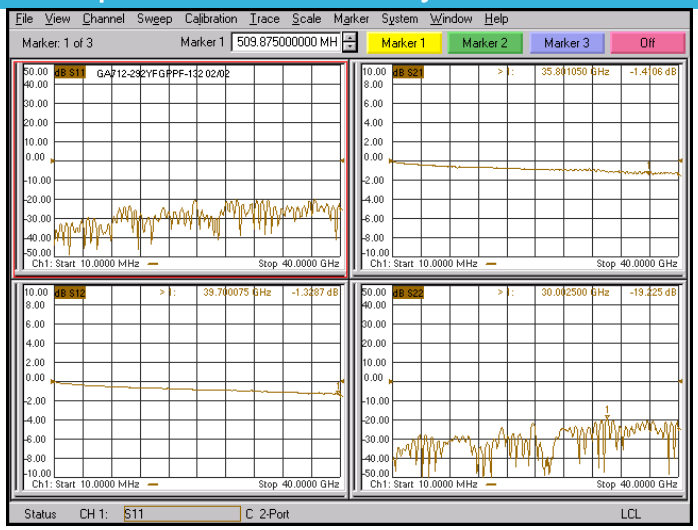

**Note:Test Cable Assembly Length = 132 mm*