
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GAF71-292WM292WM-XXX

2.92mm Male to 2.92mm Male Cable Assembly | RG-405SS Flexible Coax Cable | DC - 40GHz



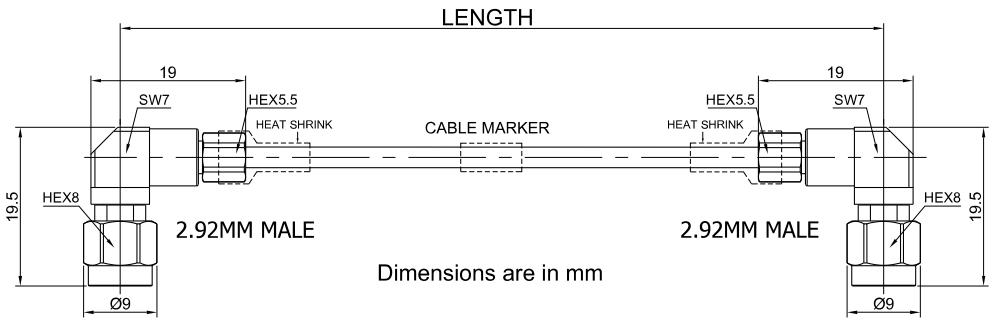


Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	2.92mm
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Right Angle	Right Angle
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration

Cable Type	RG-405SS
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.64
Cable Color	Turquoise
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	96.5
Velocity of Propagation	70%
Shielding Effectiveness	< -100dB @ 1GHz

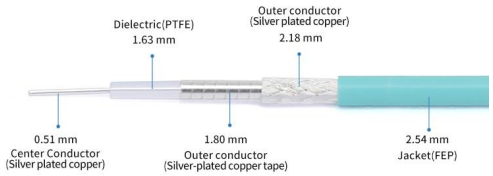

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GAF71-292WM292WM-XXX

2.92mm Male to 2.92mm Male Cable Assembly | RG-405SS Flexible Coax Cable | DC - 40GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 40GHz	1.44	1.32 to 40GHz
150	±3			1.63 to 40GHz
200	±3			1.94 to 40GHz
250	±3			2.25 to 40GHz
300	±5			2.56 to 40GHz
400	±5			3.21 to 40GHz
500	±5			3.82 to 40GHz
800	±10			5.66 to 40GHz
1000	±10			6.9 to 40GHz
1500	±15			10.0 to 40GHz
2000	±20			13.5 to 40GHz

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45°C to +125°C