


P/N: FRN9C-TNCMTNCM-XXX

TNC Male to TNC Male Cable Assembly | LMR400 Flexible Coax Cable With PE Jacket | DC - 9GHz

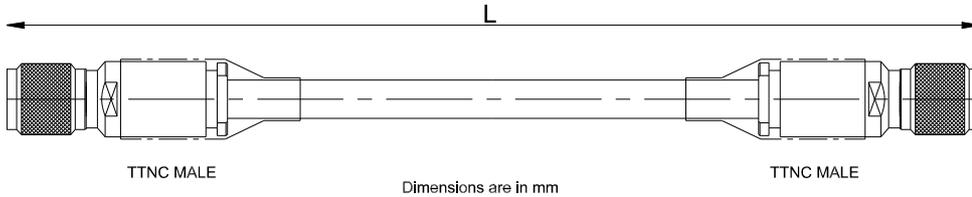

## Connectors Configuration

	Connector 1	Connector 2
Connector Series	TNC	TNC
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel

## Cable Configuration

Cable Type	LMR400
Cable Impedance (Ohm)	50
Inner Conductor Material	Copper-clad aluminum wire
Dielectric Material	Foam PE
Number of Shields	2
Shield Layer 1 Material	Aluminum Tape
Shield Layer 2 Material	Tinned copper Braid
Jacket Material	PE
Cable Diameter (mm)	10.29
Cable Color	Black
Minimum Bend Radius (mm)	25.4
Capacitance (pF/m)	78.4
Velocity of Propagation	84%
Shielding Effectiveness	> -90dB @ 1GHz

P/N: FRN9C-TNCMTNCM-XXX

TNC Male to TNC Male Cable Assembly | LMR400 Flexible Coax Cable With PE Jacket | DC - 9GHz


## Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
500	±5	DC - 3GHz	1.25 to 3GHz	0.25 to 3GHz
800	±10			0.30 to 3GHz
1000	±10			0.35 to 3GHz
1500	±15			0.43 to 3GHz
2000	±20			0.66 to 3GHz
3000	±30			0.92 to 3GHz
5000	±50			1.48 to 3GHz


## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A

## Test Report for Cable assembly

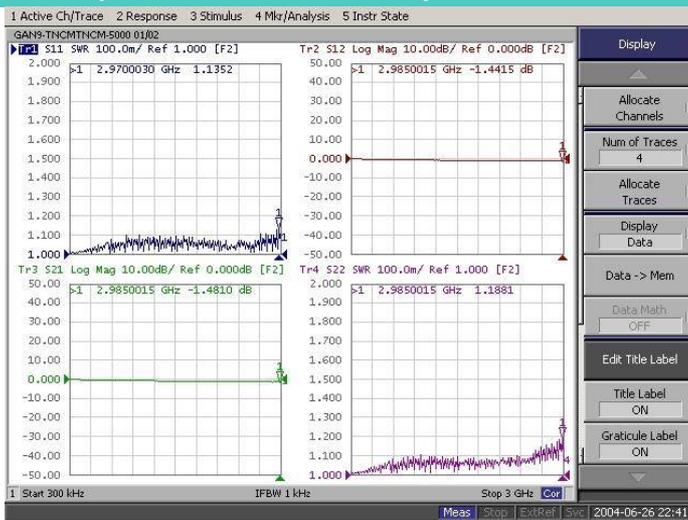

\*Note: Test Cable Assembly Length = 5000 mm

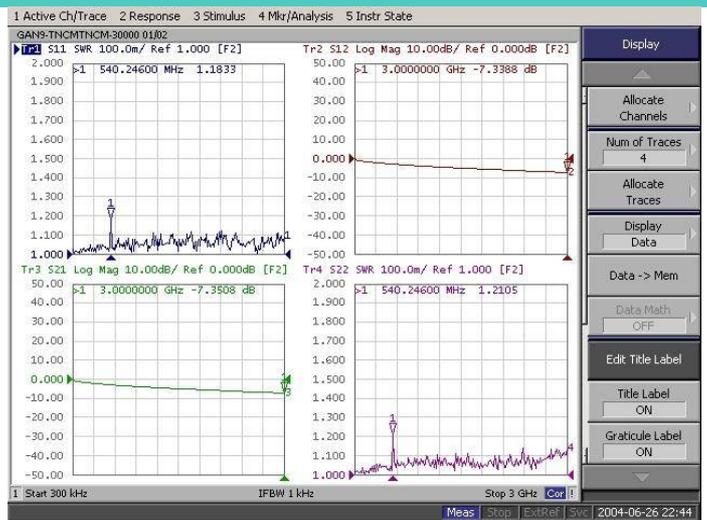

\*Note: Test Cable Assembly Length = 30000 mm