


P/N: GAN9C-NMSMM-XXX

N Male to SMA Male Cable Assembly | LMR400 Flexible Coax Cable With PE Jacket | DC - 9GHz



Dimensions are in mm

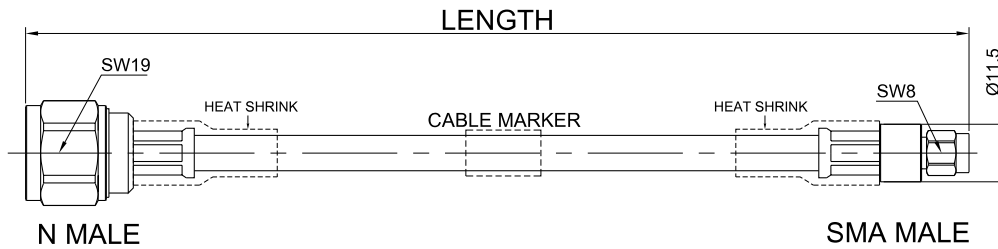

### Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Gold

### Cable Configuration

Cable Type	LMR400
Cable Impedance (Ohm)	50
Inner Conductor Material	Copper-clad aluminum wire
Dielectric Material	Foam PE
Number of Shields	2
Shield Layer 1 Material	Aluminum Tape
Shield Layer 2 Material	Tinned copper Braid
Jacket Material	PE
Cable Diameter (mm)	10.25
Cable Color	Black
Minimum Bend Radius (mm)	25.4
Capacitance (pF/m)	78.4
Velocity of Propagation	84%
Shielding Effectiveness	< -90dB @ 1GHz

P/N: GAN9C-NMSMM-XXX

N Male to SMA Male Cable Assembly | LMR400 Flexible Coax Cable With PE Jacket | DC - 9GHz

**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
500	±5	DC - 3GHz	1.35 to 9GHz	0.7 to 9GHz
800	±10			1.0 to 9GHz
1000	±10			1.2 to 9GHz
1500	±15			1.7 to 9GHz
2000	±20			2.2 to 9GHz
3000	±30			3.2 to 9GHz
5000	±50			5.2 to 9GHz

**Environmental Specifications**

RoHS Compliant

Yes

Operating Temperature Range

-40°C to +85°C