
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GAR1P-NMNM-XXX

N Male to N Male Cable Assembly | RG142-PVC Flexible Coax Cable | DC-3GHz



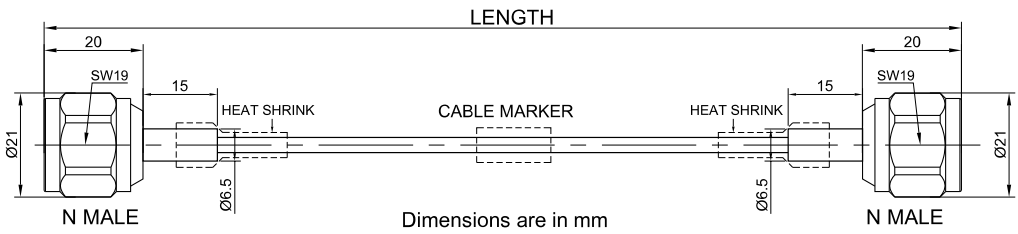


Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	N
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel

Cable Configuration

Cable Type	RG142-PVC Flexible Cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper
Dielectric Material	PTFE
Shield Layer 1 Material	silver plated copper braid
Shield Layer 2 Material	silver plated copper braid
Jacket Material	PVC
Cable Diameter (mm)	5.25±0.1
Cable Color	Blue
Minimum Bend Radius (mm)	25
Capacitance (pF/m)	96.45
Velocity of Propagation	70%
Shielding Effectiveness	< -80dB @ 1GHz

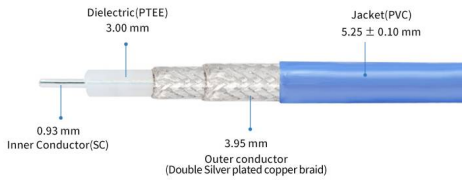

Gwave Technology Inc

(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GAR1P-NMNM-XXX

N Male to N Male Cable Assembly | RG142-PVC Flexible Coax Cable | DC-3GHz


Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
1000	±10	DC - 6GHz	1.25	1.54
1500	±15			2.19
2000	±20			2.84
5000	±50			6.74


Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-20°C to +70°C

Test Report for Cable assembly

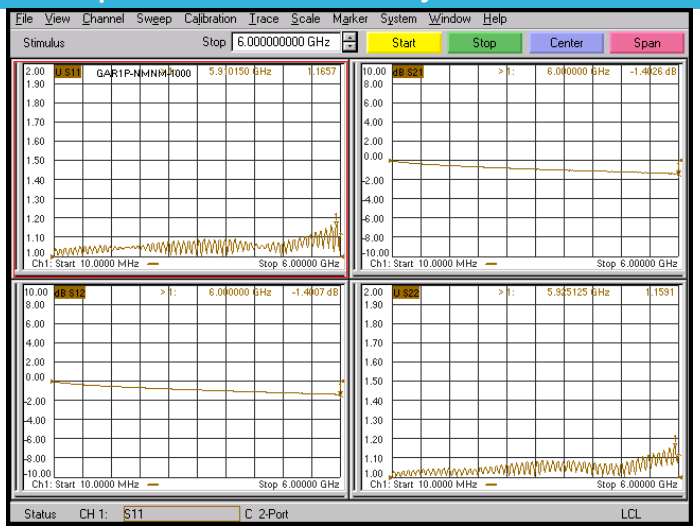

*Note:Test Cable Assembly Length = 1000 mm

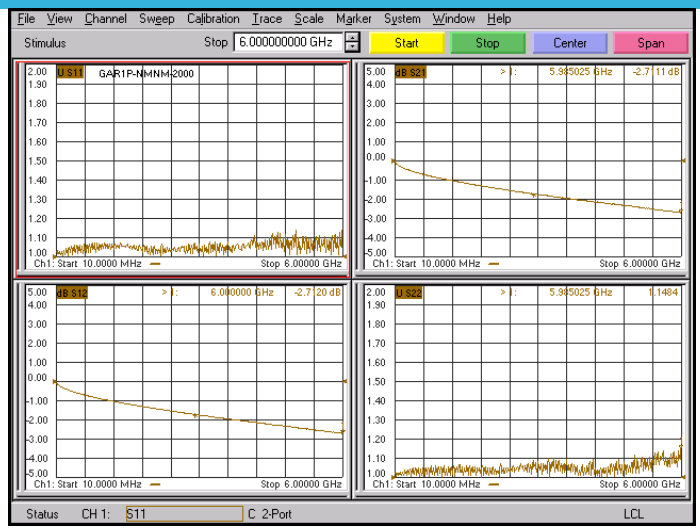

*Note:Test Cable Assembly Length = 2000 mm