


**P/N: GAR8-SMMMMCXWM-XXX**

**SMA Male to MMCX Right Angle Male Cable Assembly | RG178 Flexible Coax Cable | DC - 3GHz**

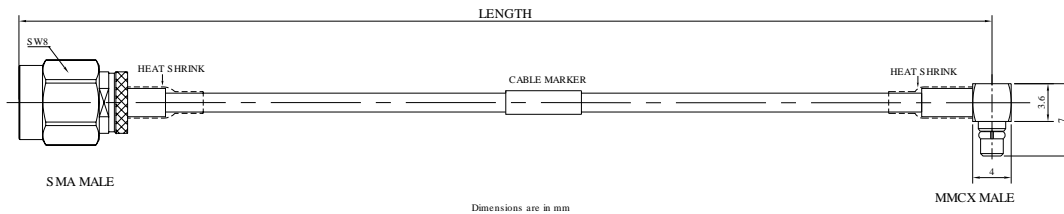


**Connectors Configuration**

	Connector 1	Connector 2
Connector Series	SMA	MMCX
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Right Angle
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

**Cable Configuration**

Cable Type	RG178
Cable Impedance (Ohm)	50
Inner Conductor Material	Copper Clad Steel, Silver, 7 Strands
Dielectric Material	PTFE
Number of Shields	1
Shield Layer 1 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	1.83
Cable Color	tan
Minimum Bend Radius (mm)	10.16
Capacitance (pF/m)	96.5
Velocity of Propagation	70%
Shielding Effectiveness	>-70dB@1GHz

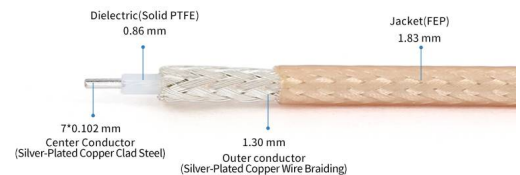

P/N: GAR8-SMMMMCXWM-XXX

SMA Male to MMCX Right Angle Male Cable Assembly | RG178 Flexible Coax Cable | DC - 3GHz


**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
500	±5	DC - 6GHz	1.30 to 3GHz	1.75 to 3GHz
800	±10			2.44 to 3GHz
1000	±10			2.95 to 3GHz
1500	±15			4.15 to 3GHz
2000	±20			5.35 to 3GHz
3000	±30			7.65 to 3GHz
5000	±50			12.25 to 3GHz


**Environmental Specifications**

RoHS Compliant  
Yes  
Operating Temperature Range  
-40 °C to +80 °C

**Test Report for Cable assembly**

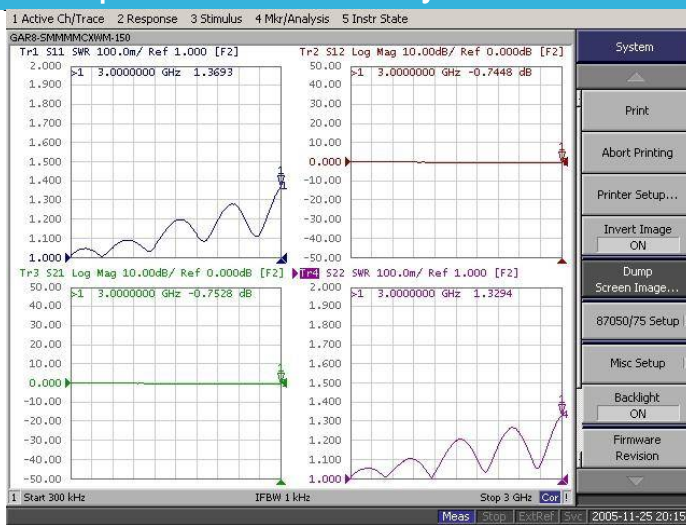

\*Note: Test Cable Assembly Length = 150 mm

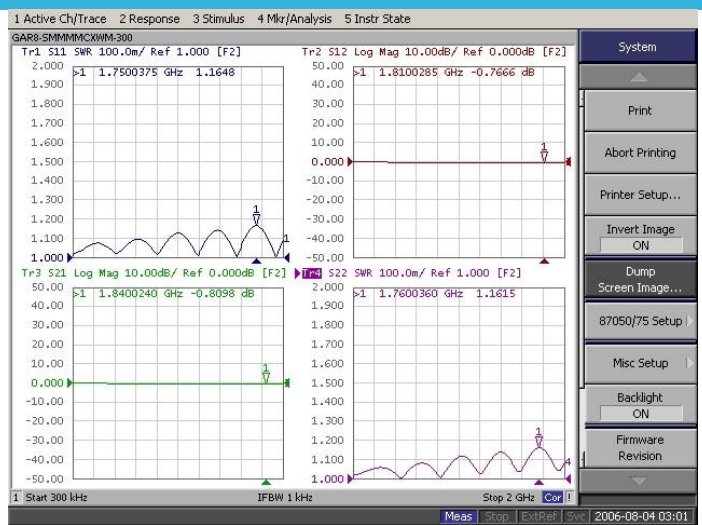

\*Note: Test Cable Assembly Length = 300 mm