


**P/N: GAU12-10F10F-XXX**

**1.0mm Female to 1.0mm Female Cable Assembly | .047" U12 Series Low Loss Phase Stable Flexible Coax Cable | DC - 110GHz**



Dimensions are in mm

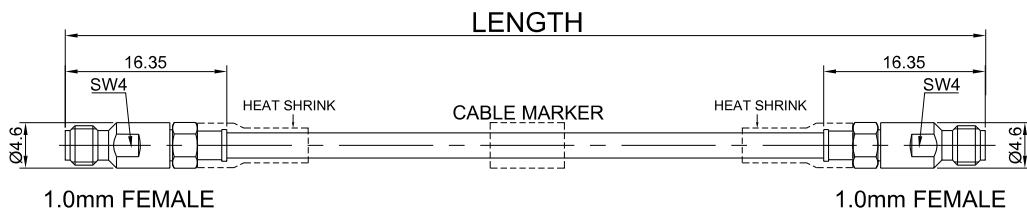


## Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.0mm	1.0mm
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

## Cable Configuration

Cable Type	U12-110G Series
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	ePTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	1.85
Cable Color	Gray
Minimum Bend Radius (mm)	10
Capacitance (pF/m)	86
Velocity of Propagation	80%
Shielding Effectiveness	> 90dB @ 1GHz
Middle layer	ePTFE

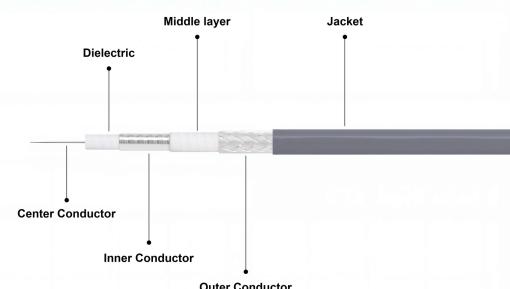

**P/N: GAU12-10F10F-XXX**

**1.0mm Female to 1.0mm Female Cable Assembly | .047" U12 Series Low Loss Phase Stable Flexible Coax Cable | DC - 110GHz**

### Electrical Data

#### Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss $\leq$ (dB)
100	$\pm 3$	DC - 110GHz	1.44 to 110GHz	2.0 to 110GHz
150	$\pm 3$			2.7 to 110GHz
200	$\pm 3$			3.2 to 110GHz
250	$\pm 3$			4.1 to 110GHz
300	$\pm 5$			4.8 to 110GHz
400	$\pm 5$			5.8 to 110GHz
500	$\pm 5$			7.1 to 110GHz
800	$\pm 10$			11.1 to 110GHz
1000	$\pm 10$			13.7 to 110GHz

### Environmental Specifications

RoHS Compliant

Yes

Operating Temperature Range

-55 °C to +165 °C