


2.92mm Male to GPPO(Mini-SMP) Right Angle Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz

P/N: GAU2-292MGPPWF-XXX

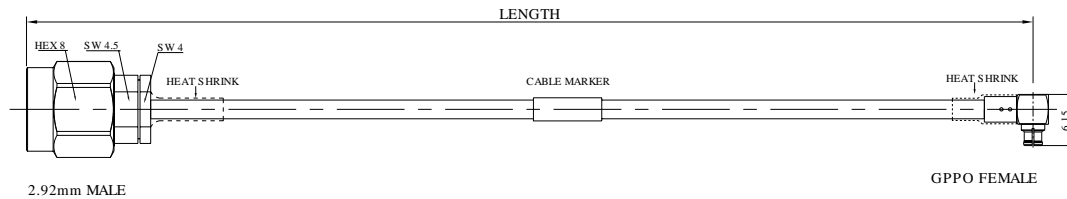

Dimensions are in mm

Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method		None
Connector Body Style	Straight	Right Angle
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	GT3506
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	LD-PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.2
Cable Color	Grey
Minimum Bend Radius (mm)	Grey
Capacitance (pF/m)	94
Velocity of Propagation	82%
Shielding Effectiveness	> -100dB @ 1GHz

2.92mm Male to GPPO(Mini-SMP) Right Angle Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz

P/N: GAU2-292MGPPWF-XXX

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 40GHz	10dB to 40GHz	1.12 to 40GHz
200	±3			1.54 to 40GHz
300	±5			2.06 to 40GHz
500	±5			2.98 to 40GHz
800	±10			4.42 to 40GHz
1000	±10			5.32 to 40GHz
1500	±15			7.52 to 40GHz
2000	±20			9.75 to 40GHz

Enviromental Specifications

RoHS Compliant

Yes


Operating Temperature Range

-40 °C to +80 °C


MIL/STD

N/A

Test Report for Cable assembly

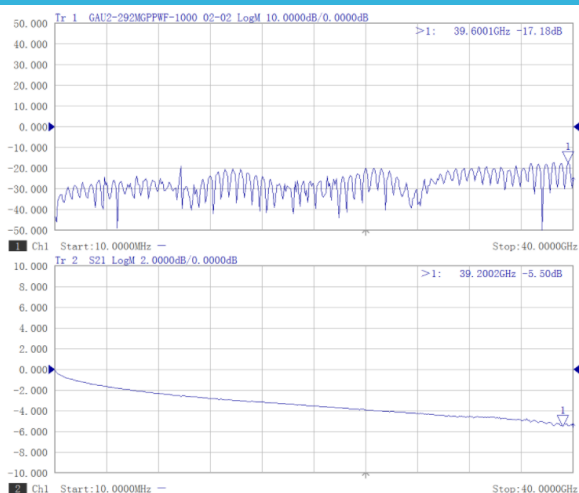

*Note: Test Cable Assembly Length = 1000 mm

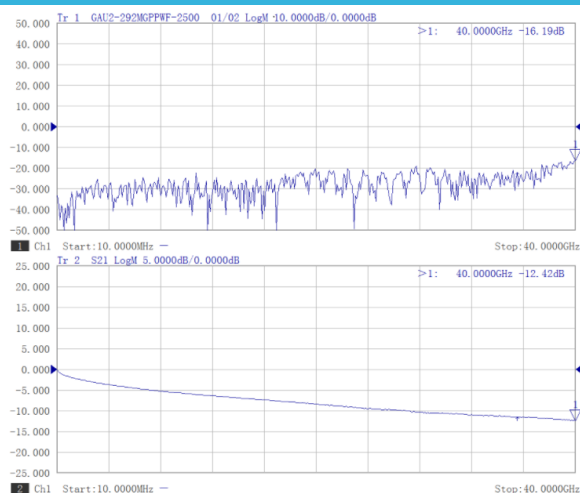

*Note: Test Cable Assembly Length = 2500 mm