


## 2-Way SMA Power Divider From 2 GHz to 8 GHz Rated at 30 Watts

P/N: GPD-2-020080-E



Dimensions are in mm

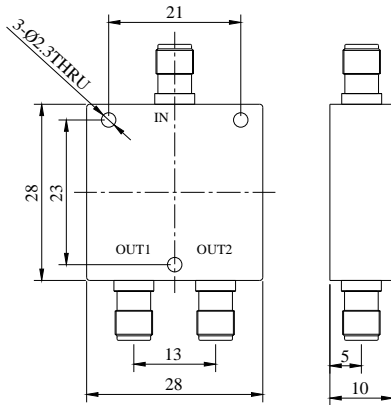

### Product Configuration

Connector-In Series	SMA
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	SMA
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

### Electrical Specifications

Insertion Loss	≤0.6
Power, Max Input (Watts)	30
VSWR, Max Input	1.25
Frequency Range	2-8GHz
VSWR, Max Output	1.2
Amplitude Balance (dB)	±0.2
Phase Balance (°)	±3
Isolation Min.(dB)	20

### Mechanical Data

Mating Cycles, Min	≥500
Weight (g)	21 g
Colour	Black
Housing Material	Aluminum

## 2-Way SMA Power Divider From 2 GHz to 8 GHz Rated at 30 Watts

P/N: GPD-2-020080-E

### Environmental Specifications

RoHS Compliant

Yes

Operating Temperature Range

-45 °C to +85 °C

### Test Data

