


2-Way 2.92mm Power Divider From 4 GHz to 40 GHz Rated at 20 Watts

P/N: GPD-2-040400-T

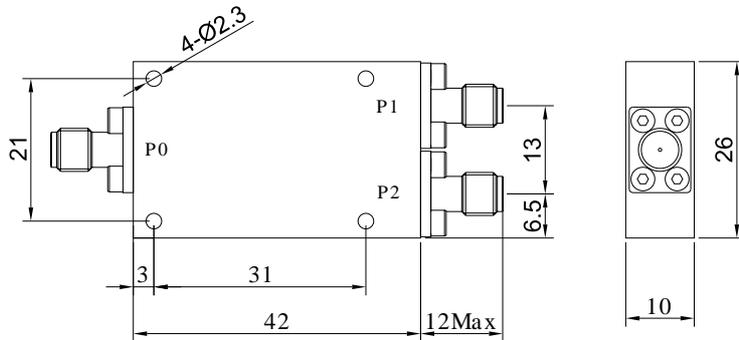

Dimensions are in mm

## Product Configuration

Connector-In Series	2.92mm
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	2.92mm
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

## Electrical Specifications

Insertion Loss	≤ 1.8dB
Power, Max Input (Watts)	20
Return Loss or VSWR Input	1.6
Frequency Range	4GHz to 40GHz
Return Loss or VSWR Output	1.6
Amplitude Balance (dB)	±0.3
Phase Balance (°)	±4
Isolation Min.(dB)	18

## Mechanical Data

Min. Mating Cycles	≥500
Weight (g)	40.15 g
Colour	Black
Housing Material	Aluminum

2-Way 2.92mm Power Divider From 4 GHz to 40 GHz Rated at 20 Watts

P/N: GPD-2-040400-T

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
Storage Temperature Range	-55 °C to +85 °C