


## 4-Way 2.92mm Power Divider From 18 GHz to 40 GHz Rated at 20 Watts

P/N: GPD-4-180400-E



Dimensions are in mm

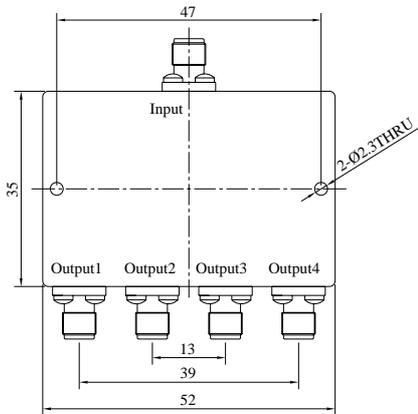

### Product Configuration

Connector-In Series	2.92mm
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	2.92mm
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

### Electrical Specifications

Insertion Loss	$\leq 1.6\text{dB}$
Power, Max Input (Watts)	20
Return Loss or VSWR Input	1.5
Frequency Range	18-40GHz
Return Loss or VSWR Output	1.5
Amplitude Balance (dB)	$\pm 0.4$
Phase Balance ( $^{\circ}$ )	$\pm 5$
Isolation Min.(dB)	16

### Mechanical Data

Min. Mating Cycles	$\geq 500$
Weight (g)	62 g
Colour	Black
Housing Material	Aluminum

## 4-Way 2.92mm Power Divider From 18 GHz to 40 GHz Rated at 20 Watts

P/N: GPD-4-180400-E

### Environmental Specifications

RoHS Compliant

Yes

Operating Temperature Range

-45 °C to +85 °C

### Test Data

