


## SMA Female Low Noise Amplifier (LNA) | 20dB Gain | 1.8dB Noise Figure | 5 - 11GHz

P/N: LNA-5G11G-G20-P15



Dimensions are in mm

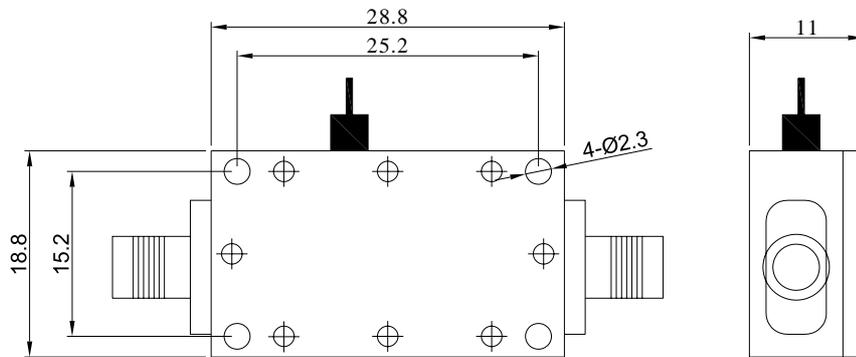

### Product Configuration

Connector-In Series	SMA
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	SMA
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

### Electrical Specifications

Frequency Range	5-11GHz
Gain, Typical (dB)	20
P-1dB (dBm)	15
Noise Figure, Max (dB)	1.8
Voltage, DC Typ (Volts)	+3.3
Current, Max (mA)	80
Max Input Power (dBm)	0

**SMA Female Low Noise Amplifier (LNA) | 20dB Gain | 1.8dB Noise Figure | 5 - 11GHz**

**P/N: LNA-5G11G-G20-P15**

## Mechanical Data

Min. Mating Cycles	≥500
Weight (g)	19 g

## Environmental Specifications

RoHS Compliant	Yes
----------------	-----