


P/N: VNA-292F292M-630

2.92mm NMD Female to 2.92mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable | With Armor | DC - 40GHz

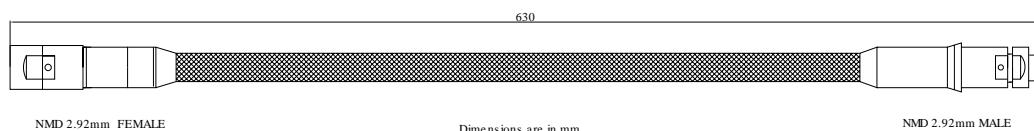

Connectors Configuration

| | Connector 1 | Connector 2 |
|---------------------------|-----------------|-----------------|
| Connector Series | 2.92mm NMD | 2.92mm NMD |
| Connector Polarity | Standard | Standard |
| Connector Gender | Female | Male |
| Connector Impedance (Ohm) | 50 | 50 |
| Connector Body Style | Straight | Straight |
| Connector Body Material | Stainless Steel | Stainless Steel |
| Connector Body Plating | Passivated | Passivated |

Cable Configuration

| | |
|-----------------------|----|
| Cable Impedance (Ohm) | 50 |
|-----------------------|----|

P/N: VNA-292F292M-630

2.92mm NMD Female to 2.92mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable |
With Armor | DC - 40GHz

Electrical Data

Enviromental Specifications

| | |
|-----------------------------|----------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | 0 °C to +40 °C |
| MIL/STD | N/A |