


P/N: VNA-292F292M-XXX

2.92mm NMD Female to 2.92mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable | With Armor | DC - 40GHz

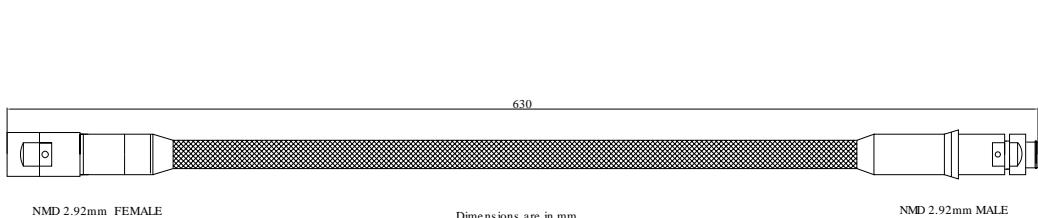

Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm NMD	2.92mm NMD
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration

Cable Impedance (Ohm)	50
Cable Diameter (mm)	15.2
Minimum Bend Radius (mm)	50
Shielding Effectiveness	>100dB to 18GHz

P/N: VNA-292F292M-XXX**2.92mm NMD Female to 2.92mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable | With Armor | DC - 40GHz**

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss \leq (dB)
1000	± 10	DC-40GHz	1.3 to 40GHz	4.15
630	± 5			2.97

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0 °C to +40 °C
MIL/STD	N/A