

**1G DIMMER / 250W
LED / LINEAR /
WITHOUT LOGO**


ACTION: DIMMER SWITCH

KNURL: LINEAR

RANGE: DIMMER SWITCHES

A solid metal dimmer switch with our latest linear knurling. The switch is finished with a solid metal plate and torx screws. Available in five different finishes, they can be used in combination with our matching toggle switches, sockets and USB outlets.



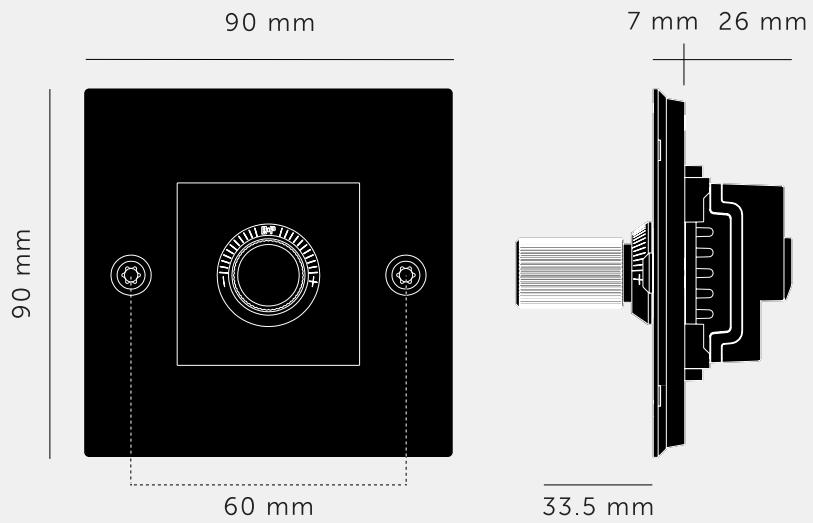

SPECIFICATIONS

Module: CDM-142038
 Style: Push ON/OFF rotary dimmer with multi location dimming via retractive switches.
 Input: 240VAC ~ 50Hz
 Dimming Type: Auto-detect trailing edge & leading edge
 Load: 10-350W Incandescent / 3-250W LED
 Operating Temperature: 0-55 C / Humidity: 10-90% R.H.
 Compatibility: For use with retractive switches, and for installation with dedicated retractive-enabled lighting circuits.
 Not compatible with standard 2-way & 3-way switch circuits.
 Certified for use in UK, Europe and Russia: UKCA / CE / EAC

This piece features a 6.5mm shadow gap when installed.

INCLUDED

1 x Wall Plate
 1 x Dimmer Module
 1 x Detail Kit

FINISH & SKU NUMBERS

sku:	finish:	size:
CDR-024181	● black	1G
CDR-054182	● brass	1G
CDR-454183	● smoked bronze	1G
CDR-074184	● steel	1G
CDR-144185	● white	1G

PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.

CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.