

**1G DIMMER / LED /  
CROSS / WITHOUT  
LOGO / BLACK /**

---

**ACTION: DIMMER SWITCH**

---

**KNURL: CROSS**


---

**RANGE: DIMMER SWITCHES**

---

A solid metal dimmer switch with a diamond-cut knurled knob to feel amazing with every touch. The dimmer is finished with a flat plate and our signature solid metal coin screws. You can also team them up with our toggle switches, duplex and USB outlets in matching finishes.



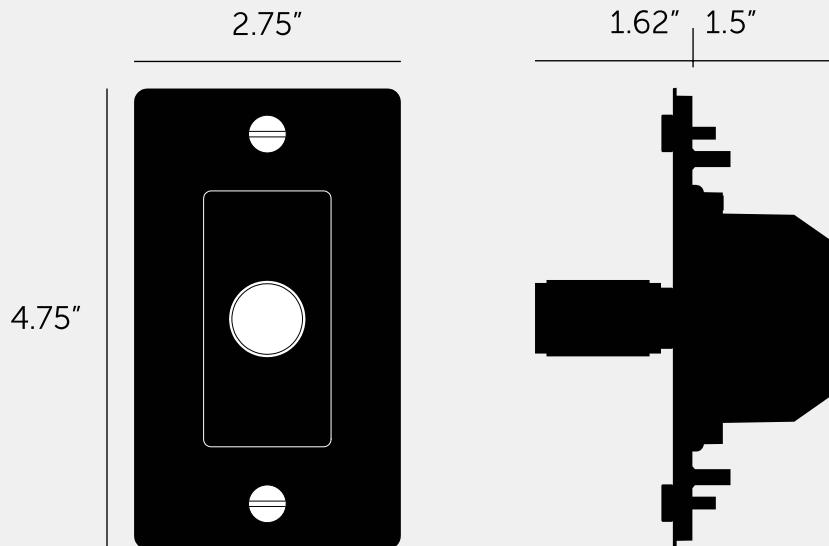

#### SPECIFICATIONS

Our Metal Electricity range has solid stainless steel plates, in our signature white, steel, brass, smoked bronze and black finishes.

Module: NDM-024061  
LED Dimmer Module  
Style: Push ON/OFF Rotary Dimmer  
Input: 100-120VAC 60 Hz  
Dimming Type: Trailing and leading edge (auto-detect & user override)  
Load: LED 5-250W / HAL/INC 10-300W  
Operating Temperature: 32° - 95°F / 0° - 35°C  
Humidity: 10 - 90% R.H.  
Certifications: cETLus 5008883  
Compatible with 3-Way & 4-Way Switches. Not Compatible with Retractive Switches. Not Compatible with non-dimmable lamps & fixtures, compact florescent lamps (CFLs), electric motors or fans.  
Testing includes:  
Overload - 100 cycles @ 150% max load  
Endurance - 10,000 cycles @ 100% max load  
Dielectric Voltage Withstand - 1500V

#### FINISH & SKU NUMBERS

| sku:       | finish:             | size: |
|------------|---------------------|-------|
| NDK-134885 | black / warm sunset | 1G    |

#### CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.

#### INCLUDED

1 x 1G Wall Plate  
1 x LED Dimmer Module  
1 x 1G Dimmer Detail Kit

#### PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.