

DUXFORD RETROFIT GEAR TRAY 4000K MICROWAVE SENSOR EMERGENCY/SELF

NET-33-06-09



Integral Microwave Sensor

Save money and energy by ensuring the fitting only comes on when movement is detected



Manual or self test emergency function

Choose between manual or self test emergency at the time of installation



Features & Benefits

- Manual or self test selectable emergency operation
- Detection range from 2m to 10m
- Hold time from 5 seconds to 10 minutes
- Daylight threshold
- Corridor function 0% or 10%
- Multiple mounting points for retro fit into existing housings

Key Data

Power	16W
Luminous Flux	1600lm
Colour Temperature	4000K
Dimensions	Ø261 x 23.6mm
Warranty	3 Years

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	100lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	52
Driver Manufacturer	Merrytek
Driver Output Voltage (DC)	36-42V
Total Circuit Power (W)	16W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	No
Operating Temp.	0°C to +45°C
Lifespan LM80	35,000 Hours
UGR Rating	More than 19
Weight	0.54Kg
Manufacturer	NET LED Lighting
Luminous Flux Factor	5%
Self Test	Selectable
Battery Pack	Li-on 3.7V
Emergency Kit	1 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer
Sensor IP Rating	IP20
Standby Dimming Level	0% / 10%
Corridor Function	Yes

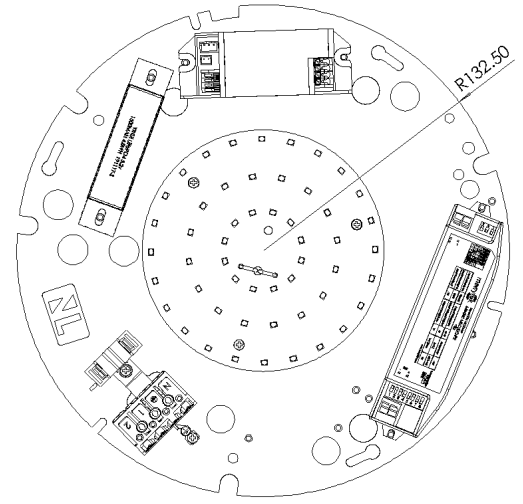

Other Options

Description	
NET-33-06-03	Duxford Retrofit Gear Tray Multi-Wattage 4000K Standard
NET-33-06-05	Duxford Retrofit Gear Tray Multi-Wattage 4000K Emergency/Self Test
NET-33-06-07	Duxford Retrofit Gear Tray 4000K Microwave Sensor
NET-33-06-09	Duxford Retrofit Gear Tray 4000K Microwave Sensor Emergency/Self Test

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

3K

4K

5.5K

DUSK TO DAWN FUNCTION

Detects ambient light levels and adjusts the light accordingly

Photo cell options only

PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5500K

INTEGRAL MICROWAVE SENSOR

Featuring a 0 or 10% Standby Mode, 2-10m detection range and 5sec to 10min hold time

Microwave Sensor options only

MULTIPLE MOUNTING POINTS

Retro fit into existing housings quickly and easily

MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

Emergency options only

MULTI WATTAGE DRIVER

Choose between 12W, 14W, 16W or 18W at the time of installation

NOT on Microwave Sensor options

NEW

NEW

