

FOXTON BATTEN TRI-COLOUR 1500MM (5FT) 50W BLUETOOTH EMERGENCY

NET-41-12-84




Optional Dimmable/Scene Switch

Compatible with any of our Bluetooth Dimmable Drivers and gives you ultimate multi-room scene control



3 Hour Emergency operation

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure



Features & Benefits

- 3H Emergency function
- Pre-set scenes and brightness levels
- Controlled via the App or optional Bluetooth Dimmable/Scene Switch
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard

Key Data

Power	50W
IP Rating	IP20
IK Rating	IK04
Dimensions	1520 x 63 x 73mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-42-43-38	Merrytek Microwave Sensor IP65 20mm Knock Out
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-60-16-80	Tridonic Bluetooth Multifunction Dimmable/Scene Switch
NET-42-43-24	DALI Dimmer Switch
NET-51-11-01	PIR Sensor (External) for Battens and NCFs

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	480
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage (DC)	20-54V
Total Circuit Power (W)	50W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Self Test	No
Housing Colour	White
Housing Material	Steel
Battery Pack	LiFePO4
Diffuser Material	Polycarbonate
Dimming Input Type	Bluetooth Dimming
Emergency Kit	3 Year Warranty
Emergency Pack	Streamer

Other Options

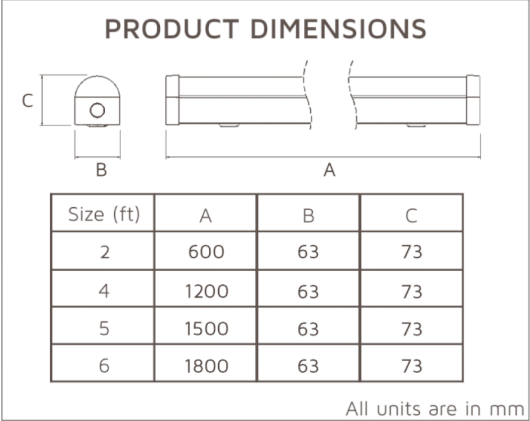

Description	
NET-41-11-96	Foxton Batten Tri-Colour 1500mm (5ft) 50W Standard
NET-41-11-95	Foxton Batten Tri-Colour 1500mm (5ft) 50W Emergency
NET-41-12-95	Foxton Batten Tri-Colour 1500mm (5ft) 50W Self Test Emergency
NET-41-11-13	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable one4all
NET-41-11-14	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable Emergency
NET-41-11-82	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable DALI Emergency
NET-41-11-83	Foxton Batten Tri-Colour 1500mm (5ft) 50W PIR Sensor On/Off
NET-41-12-83	Foxton Batten Tri-Colour 1500mm (5ft) 50W PIR Sensor On/Off Emergency
NET-41-11-84	Foxton Batten Tri-Colour 1500mm (5ft) 50W Bluetooth
NET-41-12-84	Foxton Batten Tri-Colour 1500mm (5ft) 50W Bluetooth Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

130
lm/W



**FLICKER-FREE
TRIDONIC
DIMMABLE DRIVER**

Ensure reliability, durability and performance leading to long-lasting LEDs

Dimmable options only

**COMBINED DIFFUSER
AND LEDS**

Stop juggling multiple parts and install a diffuser that comes with built-in LEDs

PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

**REAR OR END
CABLE ENTRY**

Create seamless end-to-end lighting designs

WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

Bluetooth options only



**SELECTABLE COLOUR
TEMPERATURE**

Choose your colour temperature 3000K, 4000K or 5700K