
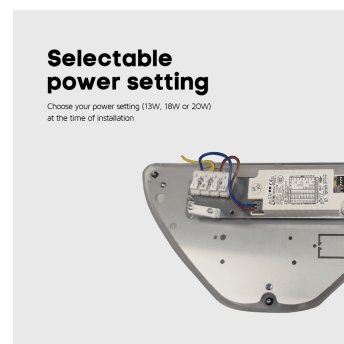
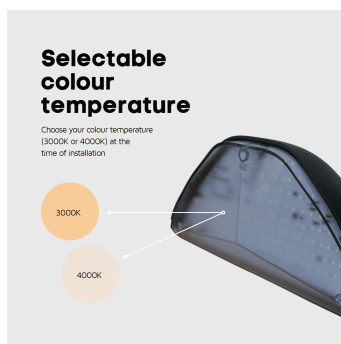


WESTON ANGULAR WALLPACK 3000K/4000K 13W/18W/28W STANDARD

NET-51-11-50

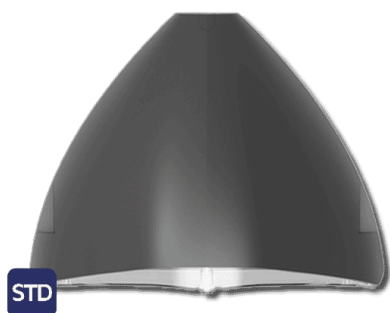

Features & Benefits

- Tri-Wattage driver allows a choice between 13W, 18W or 28W
- Selectable 3000K or 4000K colour temperature
- High efficiency - up to 140lm/W
- IP65 and IK10 rated housing
- Rear and side cable entry
- Flicker-free driver

Key Data

Power	13W/18W/28W
Luminous Flux	1700lm/2500lm/3500lm
Colour Temperature	3000K/4000K
IP Rating	IP65
IK Rating	IK10
Dimensions	319 x 265 x 165mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-51-04-59	Photocell Kit for Outdoor Lighting
--------------	------------------------------------

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	125lm/W
LED Manufacturer	Shenzhen Jingrui Photoelectric Co. Ltd.
LED Type	SMD 2835
No. of LEDs	168
Driver Manufacturer	Sealite Co. Ltd.
Total Circuit Power (W)	13W/18W/28W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°C
Dimmable	No
Operating Temp.	-20°C to +40°C
Lifespan LM80	60,000 Hours
UGR Rating	22
Weight	2.2Kg
Manufacturer	Sealite Co. Ltd
Luminous Flux Factor	1700lm/2500lm/3500lm
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	Polycarbonate

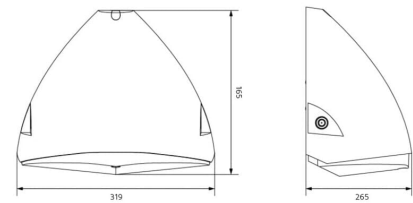

Other Options

Description	
NET-51-11-50	Weston Angular Wallpack 3000K/4000K 13W/18W/28W Standard
NET-51-11-52	Weston Angular Wallpack 3000K/4000K 13W/18W/28W Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




**REAR OR SIDE
CABLE ENTRY**

Protect your wiring from
harsh weather and possible
tampering



**SELECTABLE COLOUR
TEMPERATURE**

Choose your colour temperature
3000K or 4000K

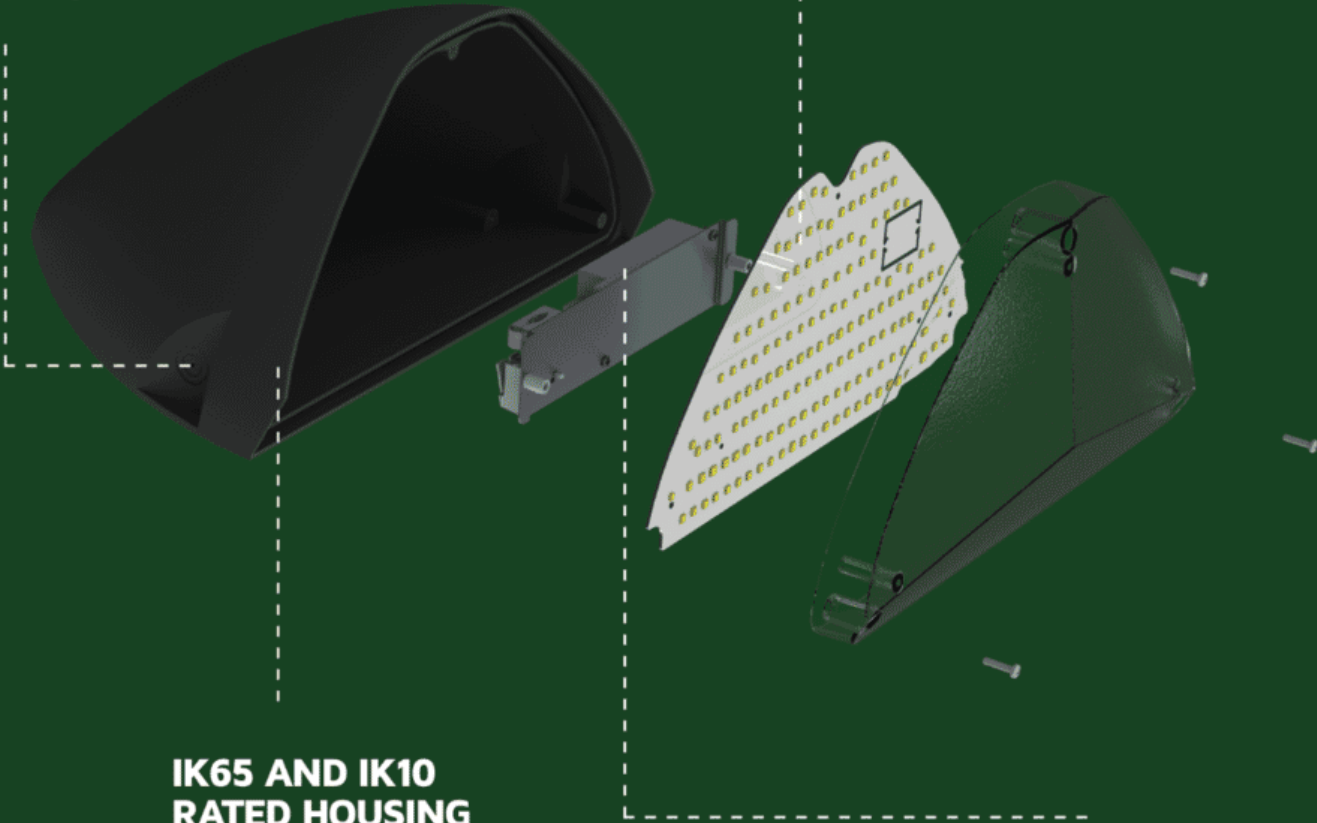

**IK65 AND IK10
RATED HOUSING**

Protect your fitting
from harsh weather
and impact

**SELECTABLE
WATTAGE**

Choose your power setting
13W, 18W or 20W

