

WESTON ANGULAR WALLPACK 3000K/4000K 13W/18W/28W EMERGENCY

NET-51-11-52



**3 Hour
Emergency
operation**

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure

**Selectable
colour
temperature**

Choose your colour temperature (3000K or 4000K) at the time of installation

Features & Benefits

- Emergency function
- Tri-Wattage driver allows a choice between 13W, 18W or 28W
- Selectable 3000K or 4000K colour temperature
- High efficiency - up to 140lm/W
- IP65 and IK10 rated housing
- Rear and side cable entry

Key Data

Power	13W/18W/28W
Luminous Flux	1700lm/2500lm/3500lm
Colour Temperature	3000K/4000K
IP Rating	IP65
IK Rating	IK10
Dimensions	319 x 265 x 165mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-51-04-59	Photocell Kit for Outdoor Lighting
--------------	------------------------------------

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	125lm/W
LED Manufacturer	Shenzhen Jingrui Photoelectric Co. Ltd.
LED Type	SMD 2835
No. of LEDs	168
Driver Manufacturer	Sealite Co. Ltd.
Total Circuit Power (W)	13W/18W/28W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°C
Dimmable	No
Operating Temp.	-20°C to +40°C
Lifespan LM80	60,000 Hours
UGR Rating	22
Weight	2.2Kg
Manufacturer	Sealite Co. Ltd
Luminous Flux Factor	1700lm/2500lm/3500lm
Housing Colour	Black
Housing Material	Aluminium
Battery Pack	LiFePO4
Diffuser Material	Polycarbonate
Emergency Kit	1 Year Warranty
Emergency Operation	3H

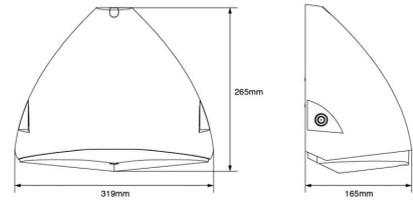

Other Options

Description	
NET-51-11-50	Weston Angular Wallpack 3000K/4000K 13W/18W/28W Standard
NET-51-11-52	Weston Angular Wallpack 3000K/4000K 13W/18W/28W Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




REAR OR SIDE CABLE ENTRY

Protect your wiring from harsh weather and possible tampering



SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature
3000K or 4000K

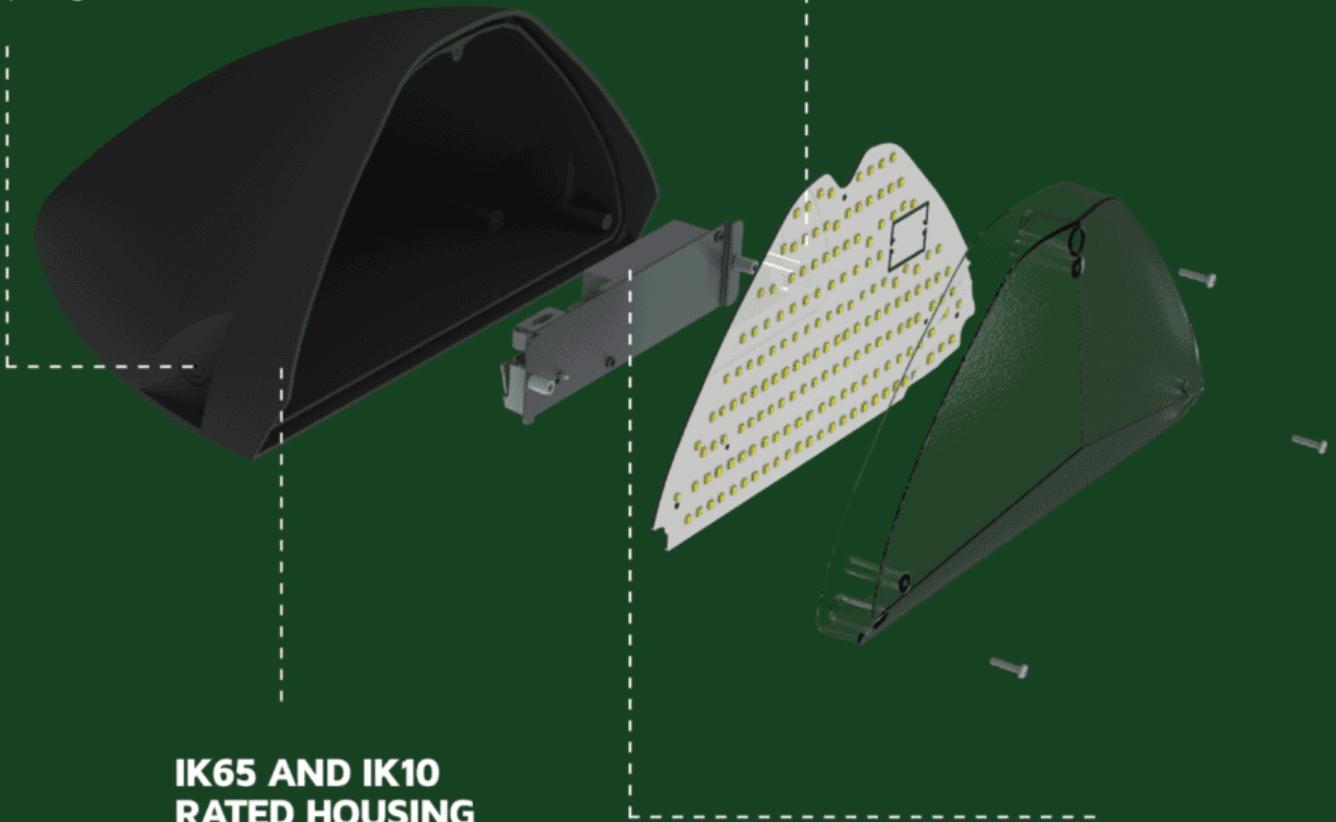

IK65 AND IK10 RATED HOUSING

Protect your fitting from harsh weather and impact

SELECTABLE WATTAGE

Choose your power setting
13W, 18W or 20W

