



Dual-head, HDMI®, digital video, audio, and USB2.0 over 1GbE IP network.

The ADDERLink INFINITY 2124T (ALIF2124T) is a high performance IP KVM extender that forms part of the ADDERLink INFINITY matrix solution. This enables the relocation of critical computing hardware into a secure and temperature controlled environment away from the user work station; while maintaining a pixel-perfect desktop experience.

ADDERLink® INFINITY 2124T (HDMI)

Perfect Digital Video, Real-Time Control

Using a spatially-lossless encoding system, with 1:1 pixel mapping, the ALIF2124 provides pixel-perfect and color accurate video with no artifacts. The digital video received is the same as the digital video leaving the remote computer.

Unlimited Extension Distances

Extension distance is not limited to a single 100 meter cable length. If you need to extend further, simply add a 1GbE network device to achieve an additional 100 meters, which can be repeated many times. Also fitted with SFP cages to accept fiber optic transceivers for much greater distances.

Flexible and Scalable Extender or Switch

Each ALIF2000 series unit can be configured as a simple extender or self-managed distributed KVM switch. Each receiver can see up to 16 sources and rapidly switch between them.

Standard IP Technology

Using standard IP technology allows a choice of CATx or fiber connections (1x RJ45 1GbE SFP module included). Resilience is offered by the optional 2nd network port which provides teaming facility for load balanced and critical systems.

USB 2.0 with Class Control


Supports USB devices including graphics tablets, jog shuttles, joysticks and 3D explorers, alongside mass storage devices. For secure applications, the system can disable the use of non-HID devices, meaning there is no need to physically block USB ports to prevent the use of mass storage devices.

ADDERLink® INFINITY Matrix

With the addition of ADDERLink® INFINITY Management (AIM) system, you can turn multiple point-to-point extenders into a scalable digital KVM matrix system that allows any workstation to link with any computer connected to the network.



ADDERLink® INFINITY 2124T (HDMI)

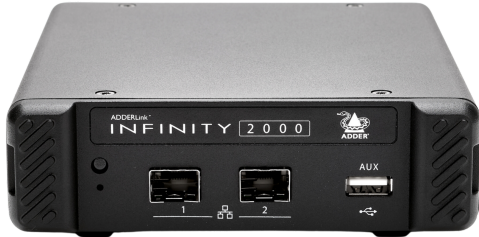

EDID Management

Intelligent EDID management allows the true characteristics of the monitor to be passed back to the computer. This ensures perfect video display without additional configuration.

Redundant Network Operation

The units support network teaming allowing for full network redundancy and increased resilience for mission-critical applications.

Plug and Play

ADDERLink INFINITY devices are delivered in a zero config state so you can plug them in and start working on them straight away. There is no need for drivers or software to be installed.

Digital Audio

The ALIF2000 series supports two channel digital audio input via USB and the digital video connector.

Video Information (1 Screen)

Maximum Resolution (1 Screen)	2560 x1600
Frame Rate (1 Screen)	60 Hz
Color Depth (1 Screen)	8 bpc

Video Information (2 Screen)

Maximum Resolution (2 Screens)	1920 x 1200
Frame Rate (2 Screens)	60 Hz
Color Depth (2 Screen)	8 bpc

Video Additional Information

Video Additional Information	The system supports up to 1x 2560x1600 @60Hz or 2x 1920x1200 @60Hz
-------------------------------------	--

Computer Connections

USB B	1x 2.0, True Emulation,High Speed
USB A	1x 2.0, True Emulation
HDMI®	2x

Link Ports

SFP	2x
------------	----

Serial Ports

Maximum Baud Rate	115,200
Serial Additional Information	RS232 or other serial standards can be passed between the units to a maximum baud rate of 115,200 by using serial to USB converters

Audio Connections

Audio Type	Analog/Digital
Channels	2x
Audio Direction	Bi-directional
Audio Additional Information	Analog audio and audio via digital video connector is uni-directional. USB audio is bi-directional
Size (bit)	16
Speed (kHz)	48
Audio In Port	1x 3.5mm jack

Network Support

Bandwidth	1GbE
------------------	------

10/100 Support	No
Additional Information	test
Environmental	
Operating Temperature Range °C / °F	0 to 40 °C / 32 to 104 °F
Storage Temperature °C / °F Range	0 to 40 °C / 32 to 104 °F
Operating Humidity (%)	10% - 90% (non-condensing)
Storage Humidity (%)	10% - 90% (non-condensing)
Altitude m/ft	2,000 / 6562
Mean Time Between Failure (MTBF)	210,000 h
MTBF Standard	Telcordia SR332 Issue 4 March 2016 Calculated @ 55C
Temperature Regulation	Fanless
Power Source	
12V 3-pin	1x
Input Power Supply	External Power Supply Unit (see manual)
Power Consumption	
Maximum Power (Watts)	18
Typical Power (Watts)	7
Physical Design	
Construction Material	Robust metal construction
U size	1
Width (mm) / (in.)	136 / 5.4
Height (mm) / (in.)	39 / 1.5
Depth (mm) / (in.)	150 / 5.9
Weight (kg) / (lb)	0.8 / 1.8
Compatibility	
OS Compatibility	All known operating systems
System Requirements	Does not support HDCP or CEC control
Approvals and Standards	
Approvals	CE, cULus - E476334, FCC, ICES, RCM, UKCA
Standards	ANSI 63.4, EN/IEC 62368-1, EN55032 /CISPR 32, EN55035/CISPR 35, EN61000-3-2, EN61000-3-3, EN63000, FCC pt15B, ICES003



ADDERLink® INFINITY 2124T (HDMI)

What's in the Box?

1x ALIF2124 Transmitter

1x SFP-CATX-RJ45: 1GbE SFP module for CATx cable

1x PSU-IEC-12VDC-1.5A: Mains power supply

2x VSCD15: 2m/6.5ft HDMI cable

1x VSC24: 2m/6.5ft USB cable

1x VSC22: 2m/6.5ft Audio cable

1x IEC PSU cable of country code

Ordering Information

ALIF2124T-XX	ALIF2124 Transmitter
--------------	----------------------

Related Accessories (Sold Separately)

ADDER® SFP-SM-LC

ADDER® SFP-CATX-RJ45

ADDER® SFP-MM-LC

ADDER® Rackmount Kit RMK17-SH

Adder and the Adder logo are trademarks of Adder Technology Ltd, Cambridge, UK. All other trademarks are the property of their respective owner and may be registered in the United States Patent and Trademark Office and in other countries. Information contained in this data sheet is up-to-date and correct as at the date of issue. As Adder Technology cannot control or anticipate the conditions under which this product may be used, each user should review the information in the specific context of planned use. Images are for illustrative purposes only. Adder reserves the right to make changes to this specification without notice.