



CCT switchable between 3000K, 4000K & 5700K



Wattage Switchable



IP66 and IK10 for total protection

## CAIMAN VERSA

CCT Colour & Wattage Switchable Anti-Corrosive with plug-in Versabox accessories

### FEATURES

IP rating	IP66
IK rating	IK10
CSP Switchable	Switchable CCT
Sensor Option	Versabox, see accessories
Dimmable Option	Yes (DALI-2, 0-10V, PUSH-DIM)
LED Lifetime	L70 100,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual, Self and DALI-2 Test

### INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-25°C to +40°C
Weight	1.33Kg - 1.63Kg
Inrush Current	16A 0.51ms
Construction Material	Polycarbonate Housing (RAL7005), Anti-UV Diffuser
SELV	No
Electric Class (1, 2, 3)	I
Install Connector Type	Removeable, moveable, loop in/out
UK Building Regulations	Part L
Mounting Options	Surface
Power Factor	0.9

### Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	EM lm	Energy
AC2N	Grey	2ft (600mm) Standard	120°	10W	3000K	1330	144	240	
					4000K	1420	154	240	
					5700K	1420	154	240	
				12W	3000K	1680	144	240	
					4000K	1800	154	240	
					5700K	1800	154	240	
				15W	3000K	2100	144	240	
					4000K	2250	154	240	
					5700K	2250	154	240	
				18W	3000K	2520	144	240	
					4000K	2700	154	240	
					5700K	2700	154	240	
AC4N	Grey	4ft (1200mm) Standard	120°	18W	3000K	2590	144	240	
					4000K	2775	154	240	
					5700K	2775	154	240	
				25W	3000K	3500	144	240	
					4000K	3750	154	240	
					5700K	3750	154	240	
				31W	3000K	4340	144	240	
					4000K	4650	154	240	
					5700K	4650	154	240	
				37W	3000K	5180	144	240	
					4000K	5550	154	240	
					5700K	5550	154	240	
AC5N	Grey	5ft (1500mm)	120°	28W	3000K	3920	140	230	

### WARRANTY

Warranty	7 years
Battery Warranty	5 years
On-Site Warranty	2 years

### FEATURES & BENEFITS

Unique full length mounting slider allows complete freedom of mounting positions

Versabox plug and play kit range to accommodate project requirements

Rear and side housing conduit entry points

Quick release moveable terminal block to suit mains cable entry point

All installation points marked to aid accurate pre-drilling


Supplied with mounting clips, hanging bracket and compression gland

Quick connect through-wired version for side entry also available

DALI-2, 0-10V and DALI Emergency option available to order contact CWD

PATENT: **Patent Pending**

BEAM ANGLE: **120°**

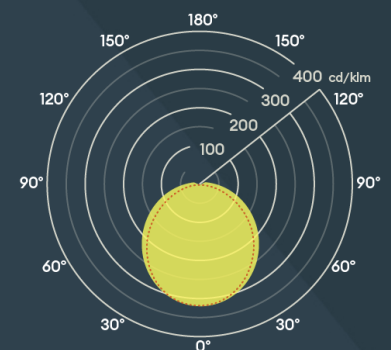

600mm (2ft)




1200mm (4ft)



1500mm (5ft)



1800mm (6ft)



92.3mm  
73mm

Caiman Versa is a game changer when it comes to lighting solutions. This product is designed to provide maximum choice and reduce the need for stockholding, making it a great option for those who need to quickly and easily install lighting systems in a variety of settings. The full length mounting slider ensures that this product can be installed in virtually any position, while the Versabox plug and play kit range means that it can be customized to meet the needs of any project. The quick release terminal block makes wiring fast and easy, while all installation points are clearly marked on the outside of the luminaire to aid in accurate pre-drilling. Additionally, the BESA mount accessory (ACBESA) is sold separately for even more flexibility. Whether you're looking for a quick connect through-wired version for side entry or a more traditional installation, Caiman Versa has everything you need to get the job done quickly and efficiently.

AC6N	Grey	6ft (1800mm) Standard	120°	Standard			
				4000K	4200	150	230
				5700K	4200	150	230
				3000K	5320	140	230
			38W	4000K	5700	150	230
				5700K	5700	150	230
				3000K	6720	140	230
			48W	4000K	7200	150	230
				5700K	7200	150	230
				3000K	7840	140	230
			56W	4000K	8400	150	230
				5700K	8400	150	230
				3000K	4690	142	200
			33W	4000K	5025	152	200
				5700K	5025	152	200
				3000K	6300	142	200
			45W	4000K	6750	152	200
				5700K	6750	152	200
				3000K	7840	142	200
			56W	4000K	8400	152	200
				5700K	8400	152	200
				3000K	9380	140	200
			67W	4000K	10050	150	200
				5700K	10050	150	200



Default Settings: 4000K colour temperature, 37W power consumption. \*Replace 'N' at the end of the part code with: 'NEM' for Manual-test Emergency models | 'D' for DALI-2/PUSH DIM | 'V' for 0-10V | Plug in kits also available as separate accessories. Energy rating is a reflection of the LED light source.

## WIRING INFORMATION

<b>Cable Required for Connector</b>	N/A
<b>Type of Wiring Required</b>	Parallel

## ACCESSORIES

<b>ACKITMANEM</b>	Manual Test Emergency plug-in Versabox	Sold Separately
<b>ACKITSELFEM</b>	Self Test Emergency plug-in Versabox	Sold Separately
<b>ACKITMWS</b>	Microwave Sensor on/off Plug-in Kit	Sold Separately
<b>ACKITMWSDIM</b>	Microwave Sensor Dim plug-in Versabox (requires 0-10V driver)	Sold Separately
<b>ACREMOTEMWS</b>	Remote for Microwave Sensor	Sold Separately
<b>ACBESA</b>	BESA Mounting Bracket	Sold Separately
<b>CASBOLT7W</b>	Casambi Wireless M20 Conduit Entry PIR+DL White 7m (requires 0-10V driver)	Sold Separately