



CCT switchable between
3000K, 4000K & 5700K



Wattage Switchable



Suspended gear tray for
easy installation



BOREALIS VERSA

CCT Colour & Wattage Switchable Batten with plug-in Versabox accessories

FEATURES

IP rating	IP20
IK rating	IK06
CSP Switchable	Switchable CCT
Sensor Option	Versabox, see accessories
Dimmable Option	Yes (DALI-2, 0-10V, PUSH-DIM)
LED Lifetime	L70 100,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual, Self and DALI-2 Test
LED Photobiological Risk Group	RG0 - No Risk

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 40°C
Weight	4ft: 1.47kg, 5ft: 1.83kg, 6ft: 2.14kg
Inrush Current	13.2A 0.28ms
Construction Material	Steel Housing, PC Opal Diffuser RAL9003
SELV	No
Electric Class (1, 2, 3)	1
Install Connector Type	Removeable, moveable, loop in/out
UK Building Regulations	Part L
Mounting Options	Ceiling, wall & suspended
Power Factor	0.9

WARRANTY

Warranty	7 years
Battery Warranty	5 years
On-Site Warranty	2 years


FEATURES & BENEFITS

- Versabox plug and play kit range to accommodate project requirements
- Multiple fixing points and several wiring options
- Ideal for sheds, garages and warehouses
- Diffuser is released by side buttons
- Self and Manual emergency option available
- DALI-2, 0-10V and DALI Emergency option available to order contact CWD

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	EM lm	Energy	
BT4NES	White	On-Off Self Test Emergency	120°	18W	4000K	2775	154	240		
					5700K	2775	154	240		
					25W	3000K	3500	144		240
						4000K	3750	154		240
					5700K	3750	154	240		
					31W	3000K	4340	144		240
				4000K		4650	154	240		
				5700K		4650	154	240		
				37W		3000K	5180	144		240
						4000K	5550	154		240
				5700K		5550	154	240		
				BT5NES	White	On-Off Self Test Emergency	120°	28W		3000K
4000K	4200	150	230							
5700K	4200	150	230							
38W	3000K	5320	140						230	
	4000K	5700	150						230	
5700K	5700	150	230							
48W	3000K	6720	140					230		
	4000K	7200	150					230		
	5700K	7200	150					230		
	56W	3000K	7840					140	230	
		4000K	8400					150	230	
	5700K	8400	150					230		
BT6NES	White	On-Off Self Test	120°	33W	3000K	4690	142	200		
					4000K	5025	152	200		

BEAM ANGLE: 120°

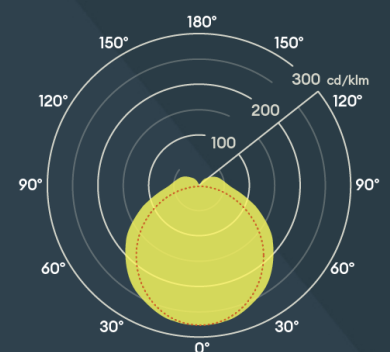

1233mm (4ft)

1533mm (5ft)

1833mm (6ft)

77mm
73mm



Bringing further versatility to the commercial offering at Collingwood, our range of Borealis Versa provides the ultimate batten with a variety of kits, from microwave sensors to manual test emergencies, DALI emergencies, and self-test emergencies. Also available in 0-10V, DALI-2 Dimmable, or On/Off to suit a project. The streamlined linear fixture, available in three lengths, allows you to create a uniform installation of perfectly distributed light. Designed with the installer in mind, this range is quick and easy to fit, keeping use of tools to a minimum. It also provides various wiring options, particularly useful in retrofit applications.

Model	Color	Control	Beam Angle	Power (W)	5700K (lm)	5025K (lm)	152 (lm)	200 (lm)	Kit	
BT4NM	White	On-Off Microwave	120°	Emergency	5700K	5025	152	200	A t G C	
					3000K	6300	140	200		
					45W	4000K	6750	150		200
					5700K	6750	150	200		
					56W	3000K	7840	140		200
					5700K	8400	150	200		
				67W	3000K	9380	140	200		
					4000K	10050	150	200		
					5700K	10050	150	200		
					18W	3000K	2590	144		240
						4000K	2775	154		240
						5700K	2775	154		240
25W	3000K	3500	144	240						
	4000K	3750	154	240						
	5700K	3750	154	240						
	31W	3000K	4340	144	240					
		4000K	4650	154	240					
	5700K	4650	154	240						
37W	3000K	5180	144	240						
	4000K	5550	154	240						
BT5NM	White	On-Off Microwave	120°	Emergency	3000K	3920	140	230	A t G C	
					4000K	4200	150	230		
					5700K	4200	150	230		
					28W	3000K	5320	140		230
						4000K	5700	150		230
					5700K	5700	150	230		
				38W	3000K	6720	140	230		
					4000K	7200	150	230		
				5700K	7200	150	230			
				48W	3000K	7840	140	230		
					4000K	8400	150	230		
				5700K	8400	150	230			
56W	3000K	8400	150	230						
	4000K	8400	150	230						
BT6NM	White	On-Off Microwave	120°	Emergency	3000K	4690	142	200	A t G C	
					4000K	5025	152	200		
					5700K	5025	152	200		
					33W	3000K	6300	140		200
						4000K	6750	150		200
					5700K	6750	150	200		
				45W	3000K	7840	140	200		
					4000K	8400	150	200		
				5700K	8400	150	200			
				56W	3000K	9380	140	200		
					4000K	10050	150	200		
				5700K	10050	150	200			
67W	3000K	10050	150	200						
	4000K	10050	150	200						
BT4NMEM	White	On-Off Microwave Manual Test Emergency	120°	Emergency	3000K	2590	144	240	A t G C	
					4000K	2775	154	240		
					5700K	2775	154	240		
					18W	3000K	3500	144		240
						4000K	3750	154		240
					5700K	3750	154	240		
				25W	3000K	4340	144	240		
					4000K	4650	154	240		
				5700K	4650	154	240			
				31W	3000K	5180	144	240		
					4000K	5550	154	240		

*Replace 'N' at the end of the part code with: 'NEM' for Manual-test Emergency models | 'D' for DALI-2/PUSH DIM-V for 0-10V | Plug in kits also available as separate accessories. Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable Required for Connector	N/A
Type of Wiring Required	Parallel

ACCESSORIES

ACKITMANEM	Manual Test Emergency plug-in Versabox	Sold Separately
ACKITSELFEM	Self Test Emergency plug-in Versabox	Sold Separately
ACKITMWS	Microwave Sensor on/off Plug-in Kit	Sold Separately
ACKITMWSDIM	Microwave Sensor Dim plug-in Versabox (requires 0-10V driver)	Sold Separately
ACREMOTEMWS	Remote for Microwave Sensor	Sold Separately

Bringing further versatility to the commercial offering at Collingwood, our range of Borealis Versa provides the ultimate batten with a variety of kits, from microwave sensors to manual test emergencies, DALI emergencies, and self-test emergencies. Also available in 0-10V, DALI-2 Dimmable, or On/Off to suit a project. The streamlined linear fixture, available in three lengths, allows you to create a uniform installation of perfectly distributed light. Designed with the installer in mind, this range is quick and easy to fit, keeping use of tools to a minimum. It also provides various wiring options, particularly useful in retrofit applications.