Unique full-length mounting slider

CCT Colour & Wattage switchable

Plug-in Emergency & Sensor kits

CAIMAN VERSA 2FT

CCT Colour & Wattage Switchable Anti-Corrosive with plug-in Versabox accessories

FEATURES

IP rating	IP66
IK rating	IK10
CSP Switchable	Switchable CCT
Sensor Option	Versabox, see accessories
Dimmable Option	Yes (DALI-2)
LED Lifetime	L70 100,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual, Self and DALI-2 Test

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 35°C
Weight	1.3 - 2.15kg
Inrush Current	16A 0.51ms
Construction Material	Polycarbonate Housing (RAL7005), Anti-UV Diffuser
SELV	No
Electric Class (1, 2, 3)	1
Install Connector Type	Removeable, moveable, loop in/out
UK Building Regulations	Part L
Mounting Options	Surface
Power Factor	0.9

WARRANTY

Warranty	7 years
Battery Warranty	5 years
On-Site Warranty	2 years

FEATURES & BENEFITS

Unique full length mounting slider allows complete freedom of mounting positions

Versabox plug and play kit range to accommodate project requirements

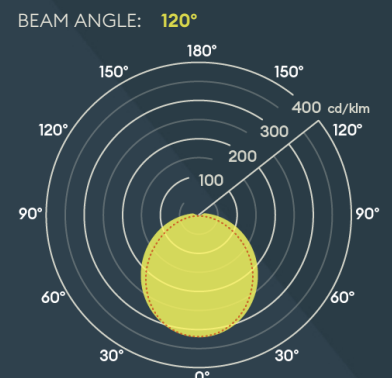Rear and side housing conduit entry points

Quick release moveable terminal block to suit mains cable entry point

All installation points marked to aid accurate pre-drilling

Supplied with mounting clips, hanging bracket and compression gland

DALI-2 and DALI Emergency option available to order contact CWD

PATENT: **Patent Pending**

## Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	EM lm	Energy
AC2N	Grey	2ft (600mm) Standard	120°	10W	3000K	1260	133	240	
					4000K	1350	142	240	
					5700K	1350	142	240	
				12W	3000K	1680	144	240	
					4000K	1800	154	240	
					5700K	1800	154	240	A↑G C
				15W	3000K	2100	144	240	
					4000K	2250	154	240	
					5700K	2250	154	240	
				18W	3000K	2520	140	240	
					4000K	2700	150	240	
					5700K	2700	150	240	
AC2NEM	Grey	2ft (600mm) On-Off Manual Test Emergency	120°	10W	3000K	1260	133	240	
					4000K	1350	142	240	
					5700K	1350	142	240	
				12W	3000K	1680	144	240	
					4000K	1800	154	240	
					5700K	1800	154	240	A↑G C
				15W	3000K	2100	144	240	
					4000K	2250	154	240	
					5700K	2250	154	240	
				18W	3000K	2520	140	240	
					4000K	2700	150	240	
					5700K	2700	150	240	
AC2D	Grey	2ft (600mm)	120°	10W	3000K	1260	133	240	A↑G C

BEAM ANGLE: 120°

600mm (2ft)
1200mm (4ft)
1500mm (5ft)
1800mm (6ft)
92.3mm
73mm

DALI-2	4000K	1350	142	240
	5700K	1350	142	240
	3000K	1680	144	240
12W	4000K	1800	154	240
	5700K	1800	154	240
	3000K	2100	144	240
15W	4000K	2250	154	240
	5700K	2250	154	240
	3000K	2520	140	240
18W	4000K	2700	150	240
	5700K	2700	150	240

WIRING INFORMATION

Cable Required for Connector	N/A
Type of Wiring Required	Parallel

ACCESSORIES

ACKITMANEM	Manual Test Emergency plug-in Versabox	Sold Separately
ACKITSELFEM	Self Test Emergency plug-in Versabox	Sold Separately
ACKITMWS	Microwave Sensor on/off Plug-in Kit	Sold Separately
ACREMOTEMWS	Remote for Microwave Sensor	Sold Separately
ACBESA	BESA Mounting Bracket	Sold Separately

Caiman Versa is a game changer when it comes to lighting solutions. This product is designed to provide maximum choice and reduce the need for stockholding, making it a great option for those who need to quickly and easily install lighting systems in a variety of settings. The full length mounting slider ensures that this product can be installed in virtually any position, while the Versabox plug and play kit range means that it can be customized to meet the needs of any project. The quick release terminal block makes wiring fast and easy, while all installation points are clearly marked on the outside of the luminaire to aid in accurate pre-drilling. Additionally, the BESA mount accessory (ACBESA) is sold separately for even more flexibility. Whether you're looking for a quick connect through-wired version for side entry or a more traditional installation, Caiman Versa has everything you need to get the job done quickly and efficiently.