



CCT switchable between 3000K, 4000K & 6500K



Wattage switchable between 10W & 15W



Emergency option available

## WARRANTY

Warranty

3 years

## FEATURES & BENEFITS

Slimline design

Multiple mounting options: BESA box, M20 conduit, cable glands

IP65 rated, making it perfect for using outdoors




High efficacy of 120lm/W

Multiple black bezel options available

Easy access push fit screwless terminals

Microwave step-dim dusk-dawn sensor, which is programmable by dip switches, saving energy by having it on only when needed

Flicker free, resulting in a more comfortable setting

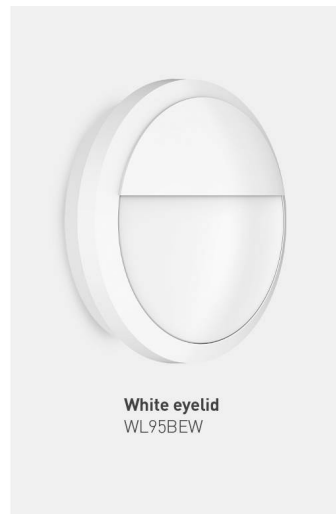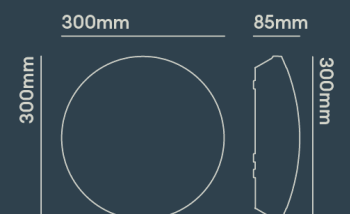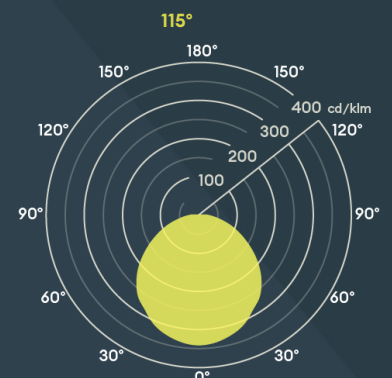

## WL95

IP65 10-15W Wattage and Colour Switchable Bulkhead

### FEATURES

IP rating	IP65
IK rating	IK08
CSP Switchable	Switchable CCT
Sensor Option	Microwave (Step-Dim)
Dimmable Option	No
LED Lifetime	L70 35,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual-Test

### INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 40°C
Weight	850g
Inrush Current	10A 50ms
Construction Material	ABS housing PC diffuser
UK Bathroom Zone	2
Electric Class (1, 2, 3)	II
Install Connector Type	4 ways, push-fit
Mounting Options	Ceiling & wall
Power Factor	0.9

### Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Ix@1m	EM lm	Energy
WL9515MCS	White	Microwave sensor	115°	10W	3000K	1100	110	364	-	AIGD
					4000K	1200	120	397	-	
					6500K	1200	120	397	-	
					3000K	1650	110	364	-	
					4000K	1800	120	397	-	
					6500K	1800	120	397	-	
WL9515ECB	Black	Emergency	115°	10W	3000K	1100	110	364	120	AIGD
					4000K	1200	120	397	120	
					6500K	1200	120	397	120	
					3000K	1650	110	364	120	
					4000K	1800	120	397	120	
					6500K	1800	120	397	120	
WL9515MCSB	Black	Microwave sensor	115°	10W	3000K	1100	110	364	-	AIGD
					4000K	1200	120	397	-	
					6500K	1200	120	397	-	
					3000K	1650	110	364	-	
					4000K	1800	120	397	-	
					6500K	1800	120	397	-	

### WIRING INFORMATION

Cable / Flying Lead	Push-fit terminals, 1.5mm <sup>2</sup> max, loop-in/loop-out.
Type of Wiring Required	Parallel

### ACCESSORIES

WL95BEW	White Eyelid Accessory	Sold Separately
---------	------------------------	-----------------