



# Calico



Part of the Wall Lights product category

<b>Model</b>	Calico Wall Light Center Connection 900mm
<b>Code</b>	ACAL3/CC/1
<b>Application</b>	Hospitality, Residential

## GENERAL INFORMATION

<b>Input</b>	220-240V
<b>Wattage</b>	14W
<b>Operating Temp</b>	-20°C-45°C
<b>Lumens Delivered</b>	1400lm (4000K)
<b>lm/W</b>	100lm/W
<b>CCT</b>	2700K/3000K/4000K
<b>Beam Angle</b>	140

## MATERIAL INFORMATION


<b>Main Material</b>	Aluminium
<b>Diffuser Material</b>	Polycarbonate
<b>Product Weight without Packaging</b>	0.45 kg
<b>Colour / Finish</b>	Black
<b>Height</b>	109 mm

## TECHNICAL INFORMATION

<b>Class Protection</b>	1
<b>Light Source</b>	LED
<b>SDCM (Initial Macadam)</b>	3
<b>CRI</b>	80
<b>Internal / External</b>	Internal
<b>Surface / Recessed / Suspended</b>	Surface
<b>Power Factor</b>	0.85
<b>L70 @ 25°C</b>	L70 B50 54000h

## PRODUCT FEATURES

- Slim, and modern architectural linear wall light suitable for residential and hospitality applications
- CCT selectable between 2700K, 3000K and 4000K
- Conveniently placed CCT selectable switch allows the installer easy access to change colour temperature prior to mounting the luminaire, providing an easy and quick installation
- Available in 600mm and 900mm with connection points at the end or centre, offering flexibility for different installations
- 350° installation angle around the connection point for flexibility of design

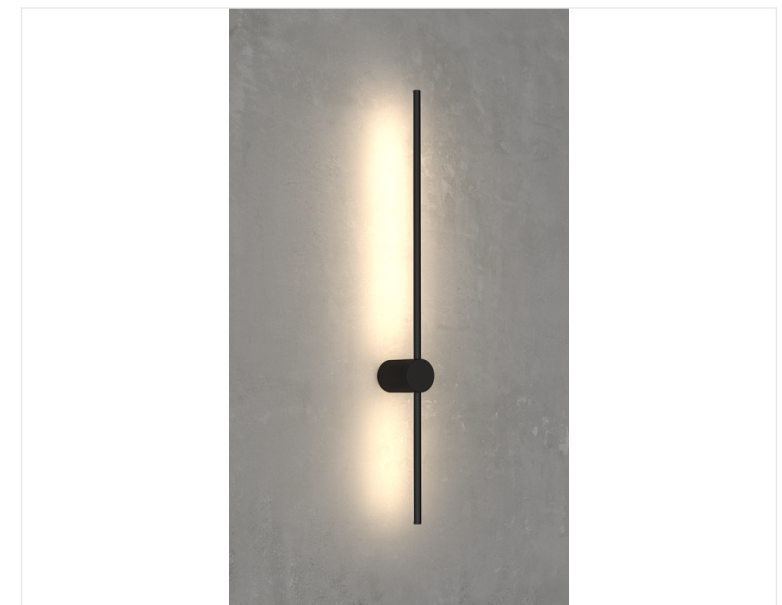



# Calico



Part of the Wall Lights product category

**Model** Calico Wall Light Center Connection 900mm  
**Code** ACAL3/CC/1  
**Application** Hospitality, Residential

