






Category	Downlights
Application	Ancillary, Hospitality, Residential, Retail
Specification	Architectural

Prism Pro Mini Fire Rated

Prism Pro Mini

Code: APRILEDP/MINI/CCT



PRODUCT FEATURES

- Ultra slim remote driver with loop-in, loop-out push fit terminals provide an easy and efficient installation
- Can be used as the sole light source or as a complimentary product to Prism Pro / Prism Pro Anti-Glare
- Detachable LED driver for fast fix install
- Fully tested for 30, 60 and 90 minute ceiling types to meet Part B of Building Regulations
- Ultra slim remote driver with loop-in, loop-out push fit terminals provide an easy and efficient installation
- Unique angled LED driver for easy installation through the smaller downlight cut out
- Low profile design and arched remote driver allows installation into shallow ceiling voids
- Fully tested to meet Part C (moisture), Part E (acoustic) and Part L (energy) of Building Regulations

GENERAL INFORMATION

Wattage	5W
Lumens Delivered	450lm (4000K)
Lm/W	90lm/W (4000K)
Beam Angle	60
CRI	80
CCT	2700/3000/4000/6000K
Input	220-240V
Operating Temp	-5°C - 25°C
SDCM	6
UGR	29
Cut-Out Size	42mm
Product Weight without Packaging	0.144 kg

TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	White
Fire Rated	Yes
IP Rating	IP65
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lumen Depreciation	L80 54,000h
Warranty (Years)	7
CE Mark	Yes
Diameter	55 mm
Height	50 mm
Accessories	APRILEDP/MINIBZ/BLK, APRILEDP/MINIBZ/CH, APRILEDP/MINIBZ/SC, ACFLP/3





Category	Downlights
Application	Ancillary, Hospitality, Residential, Retail
Specification	Architectural

Prism Pro Mini Fire Rated

Prism Pro Mini

Code: APRILEDP/MINI/CCT

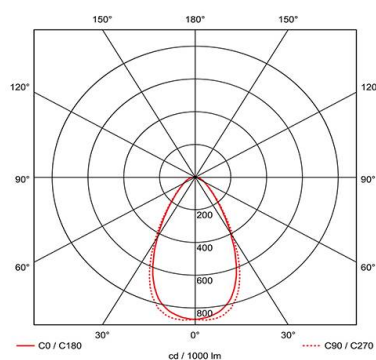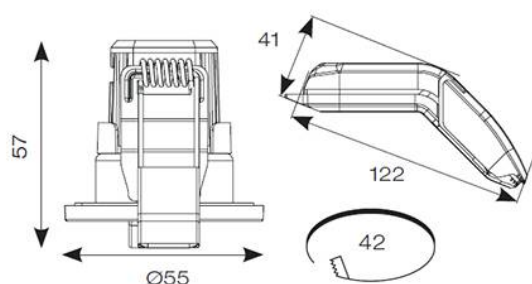

ACCESSORIES

APRILEDP/MINIBZ/BLK	Prism Pro Mini CCT Matt Black Bezel
APRILEDP/MINIBZ/CH	Prism Pro Mini CCT Chrome Bezel
APRILEDP/MINIBZ/SC	Prism Pro Mini CCT Satin Chrome Bezel
ACFLP/3	LED Emergency Lighting Pack Maintained / Non-Maintained