



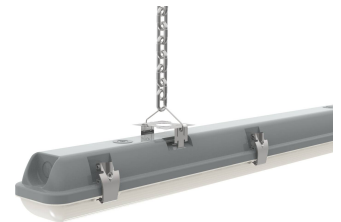

<b>Category</b>	Battens and Weatherproofs
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

# Tornado EVO

Tornado EVO CCT Multi Wattage 1800mm  
**Code:** ATORE6/1



## PRODUCT FEATURES

- IP65 non-corrosive batten suitable for industrial applications and ancillary areas
- CCT selectable between 4000K, 5000K and 6500K and power selectable; offering a choice of 2 outputs, in one luminaire
- LED performance allows point-to-point replacement of existing fluorescent luminaires
- Whole luminaire illuminates during emergency operation rather than a small area, allowing less emergency versions required on an installation
- High efficiency up to 160 Lm/W
- Slim sloped diffuser design creates sleek appearance and offers greater light distribution
- Lockable heavy-duty stainless steel clips supplied as standard for added safety and security


### GENERAL INFORMATION

<b>Wattage</b>	35W/70W
<b>Lumens Delivered</b>	5200lm - 9600lm (4000K)
<b>Lm/W</b>	150lm/W (4000K)
<b>Beam Angle</b>	120
<b>CRI</b>	80
<b>CCT</b>	4000/5000/6500K
<b>Input</b>	220-240V
<b>Operating Temp</b>	-20°C - 40°C
<b>SDCM</b>	3
<b>Energy efficiency class</b>	D
<b>Product Weight without Packaging</b>	2.08 kg

### TECHNICAL INFORMATION

<b>Light Source</b>	LED
<b>Colour / Finish</b>	Grey
<b>IP Rating</b>	IP65
<b>Class Protection</b>	1
<b>Internal / External</b>	Internal / External
<b>Surface / Recessed / Suspended</b>	Ceiling, Suspended
<b>Lumen Depreciation</b>	L80 100,000h
<b>Warranty (Years)</b>	5
<b>CE Mark</b>	Yes
<b>Height</b>	81 mm



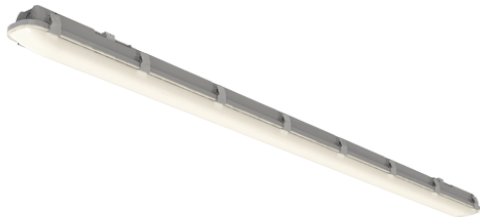

<b>Category</b>	Battens and Weatherproofs
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

# Tornado EVO

Tornado EVO CCT Multi Wattage 1800mm  
**Code:** ATORE6/1

