
Spec Sheet E03CP636CD


eterna.


5 Year Warranty

IP44

Colour Temp. Selectable

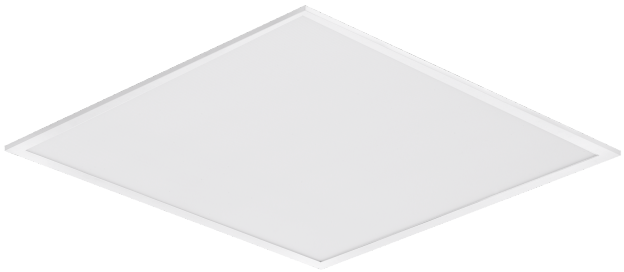





Capax

Capax 600x600 TPb CCT UGR19 36W DALI-2 Back Lit Panel

DESCRIPTION

The Capax TP(b) UGR19 rated DALI-2 backlit panel delivers high levels of efficiency at 130 lm/w, achieving low glare and effective light distribution. Three colour temperature selection within the panel offers significant versatility for a wide range of applications including commercial and educational environments

FEATURES

- High efficiency 130 lm/w
- Low profile 28mm deep design
- Tridonic DALI-2 Driver included
- Colour temperature selectable 3000K / 4000K / 6000K, CCT switch on panel cable - set to 4000K as standard
- TP(b) rated UGR19 diffuser
- IP44 rated from the front
- L80B50 50,000hrs
- Plug and play emergency pack, suspension kit and surface mount box available

GENERAL INFORMATION			
Light Source	LED	**Colour / Finish**	White
Application	Internal	**Mounting Type**	Recessed
Product Warranty	5 Years	**Net Weight**	0.3 kg
Energy Efficiency Class	D		

TECHNICAL INFORMATION			
Nominal Voltage	240	**Frequency**	50Hz
Class Protection	2	**Operating Temperature (Min)**	-20 °C
Operating Temperature (Max)	45 °C	**Average Rated Life**	50,000 h
Number of switching cycles	25,000	**Construction Materials Line 1**	Steel
Construction Materials Line 2	PS	**Dimensions - Height**	28 mm
Dimensions - Width	595 mm	**Dimensions - Depth**	595 mm
IP Rating	IP44		

PRODUCT INFORMATION			
Wattage Combined	36W	**CCT Combined**	3000K / 4000K / 6000K
Luminaire Lumens Combined	4680 - 4670 lm	**lm/W Combined**	130 - 130 lm/w
Beam Angle	90°	**CRI**	80
SDCM	<6	**Lumen Maintenance**	0.7

CE

UKCA

Member of theLIA

UK Sales: 01933 673344 | E: sales@eterna-lighting.co.uk
IE Sales: +353 1 844 6300 | E: sales@eterna-lighting.ie

Registered In England No. 410716 VAT Reg. No. GB 229 3783 37
Registered In Ireland No. 018423 VAT Reg. No. IE 8R73602D

Spec Sheet E03CP636CD

Dimmable	Dali	**Displacement Factor**	0.95
CCTI/WATTI: Rated Peak Intensity	1,422 cd		

5 Year Warranty

IP44

Colour Temp. Selectable

UK Sales: 01933 673344 | E: sales@eterna-lighting.co.uk
IE Sales: +353 1 844 6300 | E: sales@eterna-lighting.ie

Registered In England No. 410716 VAT Reg. No. GB 229 3783 37
Registered In Ireland No. 018423 VAT Reg. No. IE 8R73602D

PHOTOMETRICS					
Product Code	**Product Type**	**Watts**	**CCT**	**Luminaire lumens**	**Lm/W**
E03CP636CD	600x600, DALI-2	36 W	3000 K	4680 lm	130 lm/W
			4000 K	4770 lm	133 lm/W
			6000 K	4670 lm	130 lm/W

ACCESSORIES		
Product Code	**Description**	**MOM / OPQ**
SURFACEMK	Screwless Surface Mount Kit	1 / 20
PANSUSKIT	Suspension Pack for Panels	1 / 100
EBPM3LI	Li-Ion Battery Pack	1 / 40

PACKAGING	
Packaging Type	Plain Box
Individual unit gross weight	2,204 g
Intermediate Carton Width (mm)	0
Intermediate Carton Height (mm)	0
Intermediate Pack Qty.	0
Pallet Layer Qty	36
Pallet Layers	2
Pallet Qty	72
MOM / OPQ	1 / 6