Spec Sheet LEDOM5CR









Polished chrome over mirror 5W LED 3000K fitting with integrated push switch

DESCRIPTION

Contemporary designed alternative to a standard over mirror light. Available in Chrome or white to suit different design styles, integrated push switch for a sleek finish. The front opal diffuser offers well distributed light output to suit commercial and residential solutions

FEATURES

- · Vertical or horizontal mounting
- Elegantly integrated push switch
- Suitable for use in Bathroom Zone 3
- · IP21 rated and insulated class 2 construction
- Available in chrome or white to compliment most bathroom decors





GENERAL INFORMATION				
Light Source	LED	Colour / Finish	Polished chrome effect	
Application	Internal	Mounting Type	Surface	
Product Warranty	5 Years	Net Weight	0.56 kg	
Energy Efficiency Class	Е			

TECHNICAL INFORMATION				
1-3-11-13-13-13-13-13-13-13-13-13-13-13-				
Nominal Voltage	240 V	Frequency	50Hz	
Class Protection	2	Operating Temperature (Min)	-15 °C	
Operating Temperature (Max)	45 °C	Average Rated Life	25,000 h	
Number of switching cycles	12,500	Construction Materials Line 1	Polycarbonate	
Dimensions - Height	90 mm	Dimensions - Width	480 mm	
Dimensions - Depth	50 mm			

PRODUCT INFORMATION					
Wattage Combined	5W	CCT Combined	3000K		
Luminaire Lumens Combined	530 lm	Im/W Combined	106 lm/w		
Beam Angle	120°	CRI	80		
SDCM	<4	Lumen Maintenance	0.9		
IP Rating	IP21				














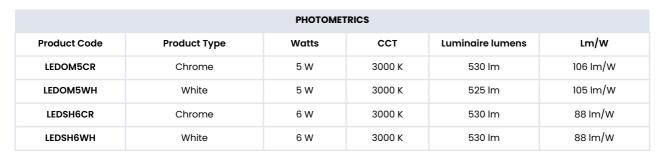

PACKAGING		
Packaging Type	Colour Box	
Individual unit gross weight	730 g	
Pallet Layer Qty	100	
Pallet Layers	4	
Pallet Qty	400	
MOM / OPQ	1 / 10	









