




# DURABAL BL

## Connector For The Durabal BL Balcony Angle Profile

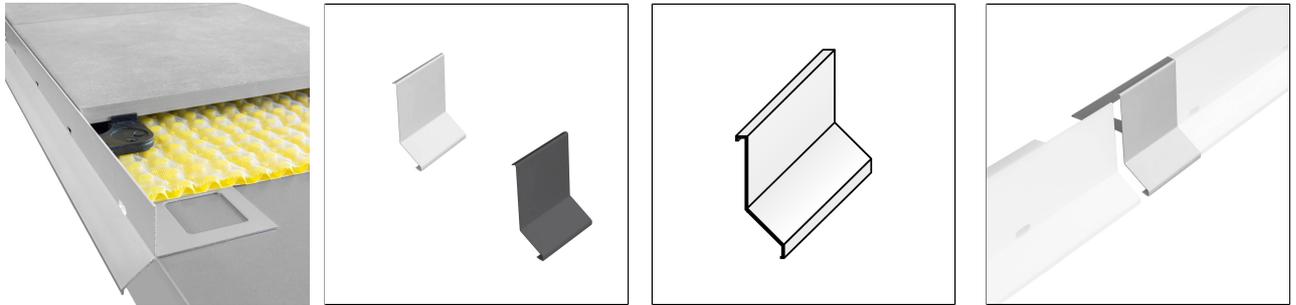

### MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

### CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

### PROCESSING

1. Select and adjust the profile according to the required installation height.
2. Apply tile adhesive to the substrate (concrete slab or dry screed) using a notched trowel.
3. Press the profile into the adhesive bed and align it in height and alignment.
4. Use suitable external corners if required. Use the connectors available as accessories to connect several profiles and corners.
5. Fill the entire surface of the fixing flange with adhesive.
6. Press the covering firmly into place and align it so that it ends slightly above the profile edge (serves as a drip sill).

Protect visible surfaces from contact with tile adhesive or grout and clean immediately with a cloth and clear water if necessary. Then rub dry.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



## TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium]
Surface	[powder coated], [anodised]
Colour	silver, anthracite grey (RAL 7016)
Length	80 cm
Height	53 mm, 65 mm, 95 mm
Width mm	80 mm
height 2	25

## PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
BLAE 530-XC/1	53 mm	anodised	silver	80 cm
BLAC 5316-XC/1	53 mm	powder coated	anthracite grey (RAL 7016)	80 cm
BLAE 650-XC/1	65 mm	anodised	silver	80 cm
BLAC 6516-XC/1	65 mm	powder coated	anthracite grey (RAL 7016)	80 cm
BLAE 950-XC/1	95 mm	anodised	silver	80 cm
BLAC 9516-XC/1	95 mm	powder coated	anthracite grey (RAL 7016)	80 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.