


DURABAL BT 11

Balcony Angle Profile With Drip Edge For Thin-Bed Installation

Valid from: 01/06/2025

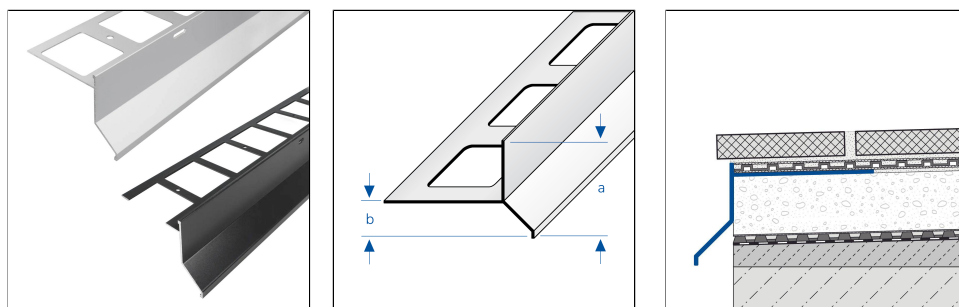

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	Aluminium
Surface	powder coated, anodised
Colour	silver, anthracite grey (RAL 7016)
Length	300 cm
Height	72 mm
Width mm	100 mm

ACCESSORIES

Matching corner pieces and connectors are available as accessories.

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

1. Select and adjust the profile according to the required installation height.
2. Apply tile adhesive to the substrate (concrete slab or dry screed) using a notched trowel.
3. Press the profile into the adhesive bed and check height and alignment.
4. If necessary, use suitable external corners. To connect several profiles and corners, use the connectors available as accessories.
5. Cover the entire surface of the fixing leg with adhesive.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



6. Press the covering firmly into place and align it so that it ends slightly above the profile edge (this acts as a drip sill).

Protect visible areas from contact with tile adhesive or grout and, if necessary, clean immediately with a sponge and clean water. Then rub dry.

The generally recognised rules of technology must be observed. The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
BTAE 72-11/300	72 mm	anodised	silver	300 cm
BTAC 7216-11/300	72 mm	powder coated	anthracite grey (RAL 7016)	300 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.