




DURAPLUS DIAMOND

Edge Trim Profile With 45° Diamond Cut Made Of Aluminium

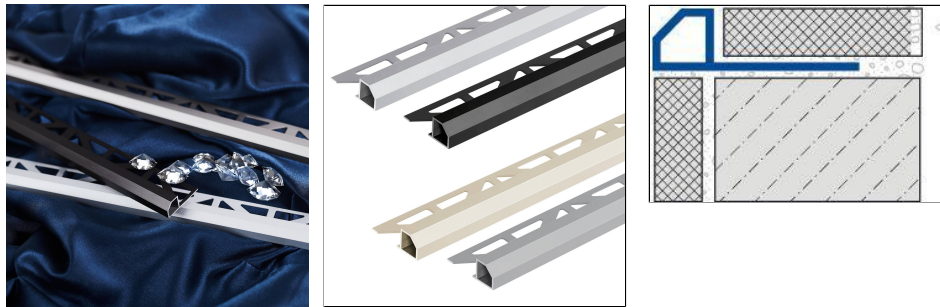

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	Aluminium
Surface	anodised, powder coated
Colour	silver, concrete grey (RAL 0006500), black matt (RAL 9005), sand (RAL 0808005)
Length	250 cm, 300 cm
Height (b)	9 mm, 10 mm, 11 mm

ACCESSORIES

Matching corner pieces are available as accessories.

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

1. Select the profile according to the tile thickness.
2. Apply tile adhesive with a notched trowel.
3. Press the profile into the adhesive bed and align.
4. Fill over the entire surface of the fixing leg.
5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush.
6. Use suitable inner or outer corner pieces.

14 March 2025 05:32 AM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



7. Leave a joint of 1-2 mm to the profile.
8. Fill the space between the tiles and the profile completely with grout.

Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then rub dry.

The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

PRODUCT VARIANTS

Ident	Height (b)	Surface	Colour	Length
DPDAE 90-SW/250	9 mm	anodised	black matt (RAL 9005)	250 cm
DPDAE 90-SW/300	9 mm	anodised	black matt (RAL 9005)	300 cm
DPDAE 90/250	9 mm	anodised	silver	250 cm
DPDAE 90/300	9 mm	anodised	silver	300 cm
DPDACM 911/250	9 mm	powder coated	black matt (RAL 9005)	250 cm
DPDACM 911/300	9 mm	powder coated	black matt (RAL 9005)	300 cm
DPDAC 965/250	9 mm	powder coated	concrete grey (RAL 0006500)	250 cm
DPDAC 965/300	9 mm	powder coated	concrete grey (RAL 0006500)	300 cm
DPDAC 980/250	9 mm	powder coated	sand (RAL 0808005)	250 cm
DPDAC 980/300	9 mm	powder coated	sand (RAL 0808005)	300 cm
DPDAE 100-SW/250	10 mm	anodised	black matt (RAL 9005)	250 cm
DPDAE 100-SW/300	10 mm	anodised	black matt (RAL 9005)	300 cm
DPDAE 100/250	10 mm	anodised	silver	250 cm
DPDAE 100/300	10 mm	anodised	silver	300 cm
DPDACM 1011/250	10 mm	powder coated	black matt (RAL 9005)	250 cm
DPDACM 1011/300	10 mm	powder coated	black matt (RAL 9005)	300 cm
DPDAC 1065/250	10 mm	powder coated	concrete grey (RAL 0006500)	250 cm
DPDAC 1065/300	10 mm	powder coated	concrete grey (RAL 0006500)	300 cm
DPDAC 1080/250	10 mm	powder coated	sand (RAL 0808005)	250 cm
DPDAC 1080/300	10 mm	powder coated	sand (RAL 0808005)	300 cm
DPDAE 110-SW/250	11 mm	anodised	black matt (RAL 9005)	250 cm
DPDAE 110-SW/300	11 mm	anodised	black matt (RAL 9005)	300 cm
DPDAE 110/250	11 mm	anodised	silver	250 cm
DPDAE 110/300	11 mm	anodised	silver	300 cm
DPDACM 1111/250	11 mm	powder coated	black matt (RAL 9005)	250 cm
DPDACM 1111/300	11 mm	powder coated	black matt (RAL 9005)	300 cm
DPDAC 1165/250	11 mm	powder coated	concrete grey (RAL 0006500)	250 cm
DPDAC 1165/300	11 mm	powder coated	concrete grey (RAL 0006500)	300 cm
DPDAC 1180/250	11 mm	powder coated	sand (RAL 0808005)	250 cm
DPDAC 1180/300	11 mm	powder coated	sand (RAL 0808005)	300 cm

14 March 2025 05:32 AM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.