




DURAWAY

Standard Ready-Made Mats

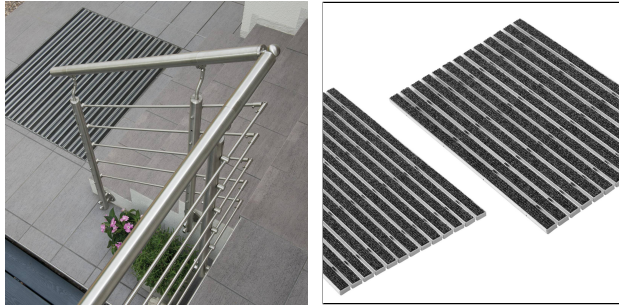

ACCESSORIES

Frame, fully assembled

MATERIAL

Aluminium can be used wherever medium mechanical loads are expected. Contact with alkaline materials (e.g. tile adhesive) can cause discolouration that is difficult to remove. High humidity during the drying phase can intensify this process. Always wipe tile adhesive or grout off visible surfaces immediately with plenty of water, then wipe dry and ensure good room ventilation.

The suitability with regard to mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic, alkaline and abrasive cleaning agents.

PROCESSING

1. Assemble the DURAWAY mat frame using the screw connections.
2. Insert the frame into the designated opening and install it precisely to the required height.
3. The tiles can then be laid on the frame. Ensure that the surface is flush and that there is a joint width of 2–3 mm all around.
4. Once the laying mortar has dried completely, the surface can be grouted.
5. Once the joints are complete and completely dry, the DURAWAY doormat can be inserted.

Protect visible frame surfaces from contact with tile adhesive or joint mortar. If necessary, remove any dirt immediately with a cloth and clear water and then rub dry.

The generally accepted rules of technology must be observed.

The suitability with regard to mechanical and chemical loads must always be checked in each individual case.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium]
Colour	black (33), light grey (97)
Length	60 cm, 80 cm
Height	10 mm
Width mm	400 mm, 600 mm

PRODUCT VARIANTS

Ident	Height	Colour	Length
DWR 1033-6040	10 mm	black (33)	60 cm
DWR 1033-8060	10 mm	black (33)	80 cm
DWR 1097-6040	10 mm	light grey (97)	60 cm
DWR 1097-8060	10 mm	light grey (97)	80 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.