5 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Orda 2


Kosnic
LIGHTING • SIMPLY BETTER

07516 ORD03-WHT/ST

Orda 2 Emergency twin-spot 3W Self-test White

- Trunk mount option and accessories included
- Non-maintained(3W)
- Twin fully adjustable heads allow best light coverage
- IP65, IK10
- Options of white and black finish





Overview

The Orda LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.

IP65

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary	
Product Code	ORD03-WHT/ST
Default Power	3 W
CRI	80
Lumens Output Maximum	370 lm
Maximum Efficiency	124 lm/W
Emergency Luminous Flux	370 lm
Maintained Luminous Flux	370 lm
Weight	0.68Kg
Dimensions (L x W x D) (mm)	261x184x78
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 40°C
UEM/EME Power Factor	0.5
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Automatic Self-Test
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	3.5 W
UEM/EME Protection	Class II
UEM/EME Dimensions (L x W x D) (mm)	261 x 184 x 78 mm (Wall mounting) 261 x 146 x 67 mm (Ceiling mounting)
UEM/EME Emergency Operation Test	Self-test (ATS Type S)
Beam Angle - Lumi (°)	110

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK

5 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Orda 2

Kosnic
LIGHTING • SIMPLY BETTER

07516 ORD03-WHT/ST

Accessories

Product Code	Description	Type
BAT18LFP2/L	Battery for Emergency sign DALI of MULU NITRO DOXA ORDA 3W	Battery


Overview

The Orda LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.


IP65

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

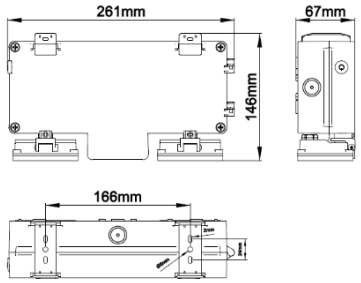

Ceiling Mounting

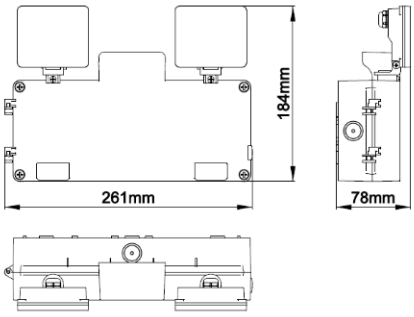

Wall Mounting

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK