

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only




UEM Pro

07958 UEM04/ST

Universal Emergency Module Pro 4W Self Test

- Built-in loop-in loop-out terminals for 2 x 3-core cables
- Designed for use with all LED luminaires (class III) with external driver
- Built-in cable clamp, push to release function
- Built-in self-test function according to BS-EN-62034-2012
- Easy Plug & Play installation and battery replacement
- For maintained or non-maintained emergency lighting systems
- Internal Li-ion battery with improved lifespan



Overview

The Universal Emergency Module (UEM) with available Automatic Self-Test (AST) version is suitable for class III luminaires with integrated LEDs and separate LED drivers. Provides an operation time of three hours. The UEM can be installed within a luminaire or within the ceiling void.



General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II

Technical Summary

Product Code	UEM04/ST
Dimensions (L x W x D) (mm)	211x91x32
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 45°C
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Automatic Self-Test with Manual Test Button
UEM/EME Protection	Class II
UEM/EME Weight	0.37 kg
UEM/EME Battery Output Wattage (max)	4 W
UEM/EME Dimensions (L x W x D) (mm)	211x91x32
UEM/EME Emergency Operation Test	Automatic and Manual

Compliance

LVD	EN 61347-1:2015+A1:2021, EN 61347-2-7:2012+A1:2021, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

UEM Pro



07958 UEM04/ST

Accessories

Product Code	Description	Type
BAT26LI2	Li-ion Battery Pack 2600mAh for UEM04/DA	Battery


Overview

The Universal Emergency Module (UEM) with available Automatic Self-Test (AST) version is suitable for class III luminaires with integrated LEDs and separate LED drivers. Provides an operation time of three hours. The UEM can be installed within a luminaire or within the ceiling void.




General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II

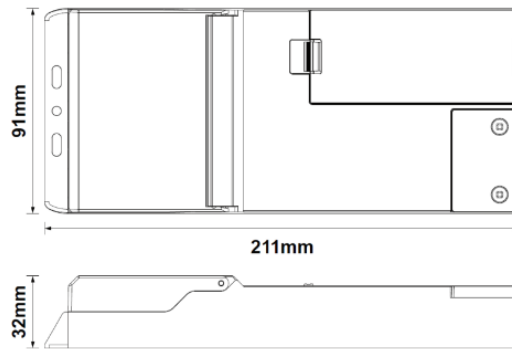

Wiring Schematic

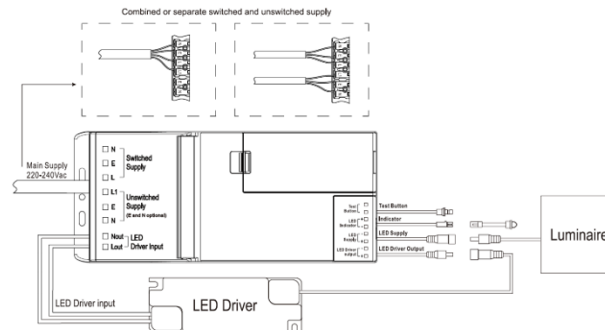

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

