7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Orda 2 DALI

Kosnic
LIGHTING • SIMPLY BETTER

09001 ORD03-BLK/DA

Orda 2 DALI Emergency twin-spot 3W DALI-2&Self-test Black

- Trunk mount option and accessories included
- Non-maintained
- Fully adjustable twin heads allow best light coverage
- IP65, IK10
- Options of white and black finish
- DALI-2 conforming to EN 62386-202





Overview

The Orda LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.

IP65

General Information

IK Rating	IK10
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary	
Product Code	ORD03-BLK/DA
Default CCT	6,500 K
CRI	80
Lumens Output Maximum	370 lm
Maximum Efficiency	110 lm/W
Emergency Luminous Flux	330 lm
Maintained Luminous Flux	330 lm
Weight	0.68Kg
UEM/EME Battery Life	7 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME CCT	6,500 K
UEM/EME Weight	0.68 kg
UEM/EME Dimensions (L x W x D) (mm)	261x184x78
Beam Angle - Lumi (°)	110

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Orda 2 DALI

Kosnic
LIGHTING • SIMPLY BETTER

09001 ORD03-BLK/DA

Overview

The Orda LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.


IP65

General Information

IK Rating	IK10
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External

Accessories

Product Code	Description	Type
BAT18LFP2/L	Battery for Emergency sign DALI of MULU NITRO DOXA ORDA 3W	Battery

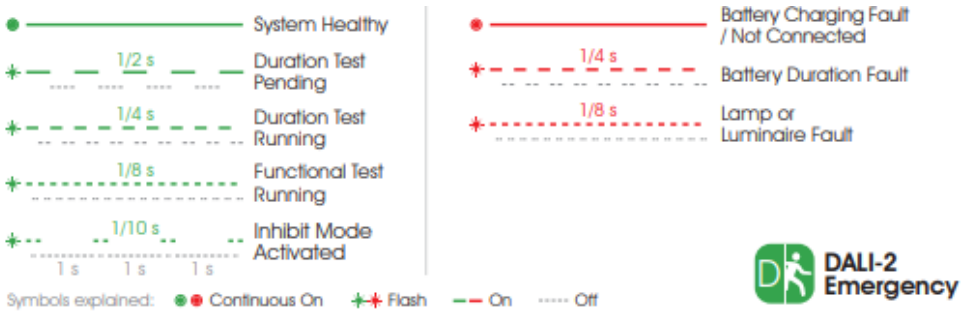

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK