7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Orda II


Kosnic
LIGHTING • SIMPLY BETTER

09002 ORD06-WHT/SST

Orda 2 Duo Emergency twin-spot 6W Manual & Self-test White

- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic Self-test conforming to BS-EN-62034
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- Trunk-mount option and accessories included
- Fully adjustable twin heads allow best light coverage
- Maintained and non-maintained options(6W)
- IP65, IK10
- Options of white and black finish





Overview

The Orda II LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.

IP65

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II
L80B10 Lifetime (h) @Ta 25 °C	107,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 62034:2012, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary	
Product Code	ORD06-WHT/SST
CRI	80
Lumens Output Maximum	650 lm
Maximum Efficiency	100 lm/W
Emergency Luminous Flux	650 lm
Maintained Luminous Flux	650 lm
L80B10 Lifetime (h) @Ta 25 °C	107,000 h
Weight	0.68Kg
Dimensions (L x W x D) (mm)	261x184x78
UEM/EME Battery Life	7 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME Power Factor	0.6
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Automatic Self-Test
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	9 W
UEM/EME Protection	Class II
UEM/EME Dimensions (L x W x D) (mm)	261 x 184 x 78 mm (Wall mounting) 261 x 146 x 67 mm (Ceiling mounting)
UEM/EME Emergency Operation Test	Manual & Self-test (ATS Type S)
Beam Angle - Lumi (°)	110

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Orda II

Kosnic
LIGHTING • SIMPLY BETTER

09002 ORD06-WHT/SST

Accessories

Product Code	Description	Type
BAT20LFP4	Battery for Push-in batten EME, Orda 2 6W	Battery


Overview

The Orda II LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.


IP65

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

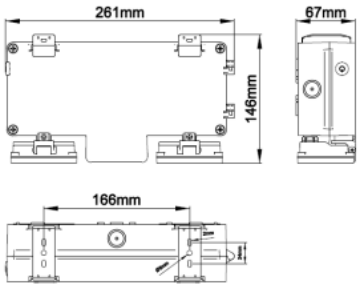

Ceiling Mounting

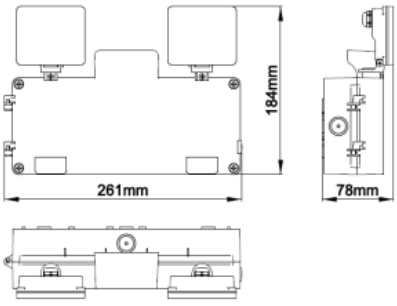

Wall Mounting



Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK


7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Orda II

Kosnic
LIGHTING • SIMPLY BETTER

09002 ORD06-WHT/SST

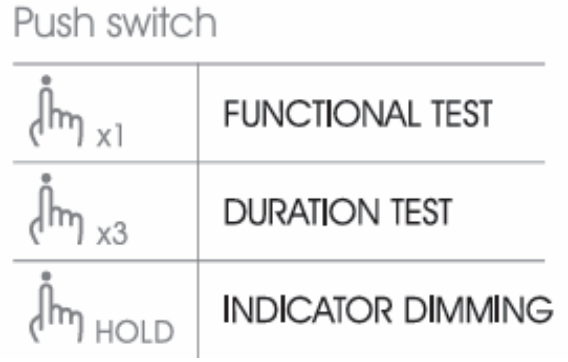

Overview

The Orda II LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.

IP65

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK