

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Mulu Mini 2 in 1


09060 MULM01/SST

Mulu Mini Duo Emergency Bulkhead Manual & Self-test IP65

- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic Self-test conforming to BS-EN-62034
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- All legends included
- Maintained and non-maintained option
- 20mm Conduit entry
- IP65 and IK10 (vandal resistant) for internal & external uses
- Dual entry push-wire terminal block for easy loop-in loop-out wiring
- BESA box fitting points

Overview

The Kosnic Mulu Mini emergency exit sign is a self-contained, multi-purpose emergency exit sign solution. With Conduit entry and BESA box fitting points for ease for installation and maintenance.

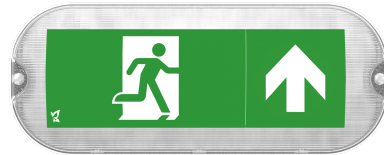

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II
L80B10 Lifetime (h) @Ta 25 °C	109,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 62034:2012, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary

Product Code	MULM01/SST
Lumens Output Maximum	80 lm
Emergency Luminous Flux	80 lm
L80B10 Lifetime (h) @Ta 25 °C	109,000 h
Weight	2Kg
BESA Entry	True
Conduit Entry 20mm	Yes
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	5 W
UEM/EME Protection	Class II
UEM/EME Weight	2 kg
UEM/EME Dimensions (L x W x D) (mm)	229x92x62

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Mulu Mini 2 in 1


09060 MULM01/SST

Accessories

Product Code	Description
BATS18LFP1	Battery for DD EME 2, Doxa 2 & EME light 2 in 1, Temp sensor

Overview

The Kosnic Mulu Mini emergency exit sign is a self-contained, multi-purpose emergency exit sign solution. With Conduit entry and BESA box fitting points for ease for installation and maintenance.

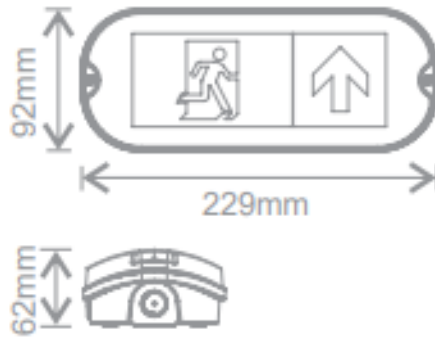

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II

Healthy Statuses:

●	—	System Healthy
* —	1/2 s	Duration Test Pending
* —	1/4 s	Duration Test Running
* —	1/8 s	Functional Test Running

Symbols explained: ● ● Continuous On * * Flash — On ---- Off

Faults & Warning:

●	—	Battery Charging Fault / Not Connected
* - - -	1/4 s	Battery Duration Fault
* - - -	1/8 s	Lamp or Luminaire Fault
* * —	5 s	Installation Fault Warning
	1 s	

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK



7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Mulu Mini 2 in 1

09060 MULM01/SST

Push switch

 x1	FUNCTIONAL TEST
 x3	DURATION TEST
 HOLD	INDICATOR DIMMING

Overview

The Kosnic Mulu Mini emergency exit sign is a self-contained, multi-purpose emergency exit sign solution. With Conduit entry and BESA box fitting points for ease for installation and maintenance.



IP65



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

